



제 2014 - 24953 호

안 전 인 증 서

(사업장명) 극동호이스트(주)

(소재지) (425-833)경기도 안산시 성곡동630-2 반월공단 B-607-14

위 사업장에서 제조하는 아래의 품목이 산업안전보건법 제34조 및 같은 법 시행규칙 제58조의4제4항에 따른 안전인증 심사 결과 안전·보건기준에 적합하므로 안전인증표시의 사용을 인증합니다.


_____ 품 목 _____
호이스트

_____ 형식,모델(용량,등급)/인증번호 _____
KD2-DL (2.0Ton) /14-AQ2AC-02169

_____ 인 증 기 준 _____
고용노동부 고시 제2012 - 33호 (위험기계,기구 의무안전인증 고시)

_____ 인 증 조 건 _____

2014년 07월 02일



한국산업안전보건공단이사장



심사결과통지서

신청인	사업장명	극동호이스트(주)	사업장관리번호 (사업자등록번호)	134-81-013350 134-81-01335
	소재지	(425 - 833) 경기도 안산시 성곡동630-2 반월공단 B-607-14		
	대표자 성명	최성찬		
안전인증대상 기계·기구명		호이스트		
형식(규격)		KD2-DL	용량(등급)	2.0 Ton
인증심사원		강성두		

산업안전보건법 제 34조 및 같은 법 시행규칙 제58조의4에 따라 실시한 서면심사
결과가 적합함을 통지합니다.

2011 년 07 월 07 일

한국산업안전보건공단 경기서부지도원장



동일형식 일람표


사업장명	구동호이스트(좌)	개정일자 및 번호		동일 형식 인정범위 및 내역		인증번호	비고
		형식 및 모델	모델	권상속도(m/min)	회행속도(m/min)	양정(m)	
KD2-DL			KD2-L6-DL	고속:10M/MIN	고속:24M/MIN	6	모터구동식
			KD2-L9-DL		저속:16M/MIN	9	
			KD2-L12-DL			12	
				저속:5M/MIN	듀얼고속:24/12M/MIN 듀얼저속:16/8M/MIN		




192.168.11.155 / 2011-07-12 14:37:27

한국산업안전보건공단

192.168.11.155 / 2011-07-12 14:37:27


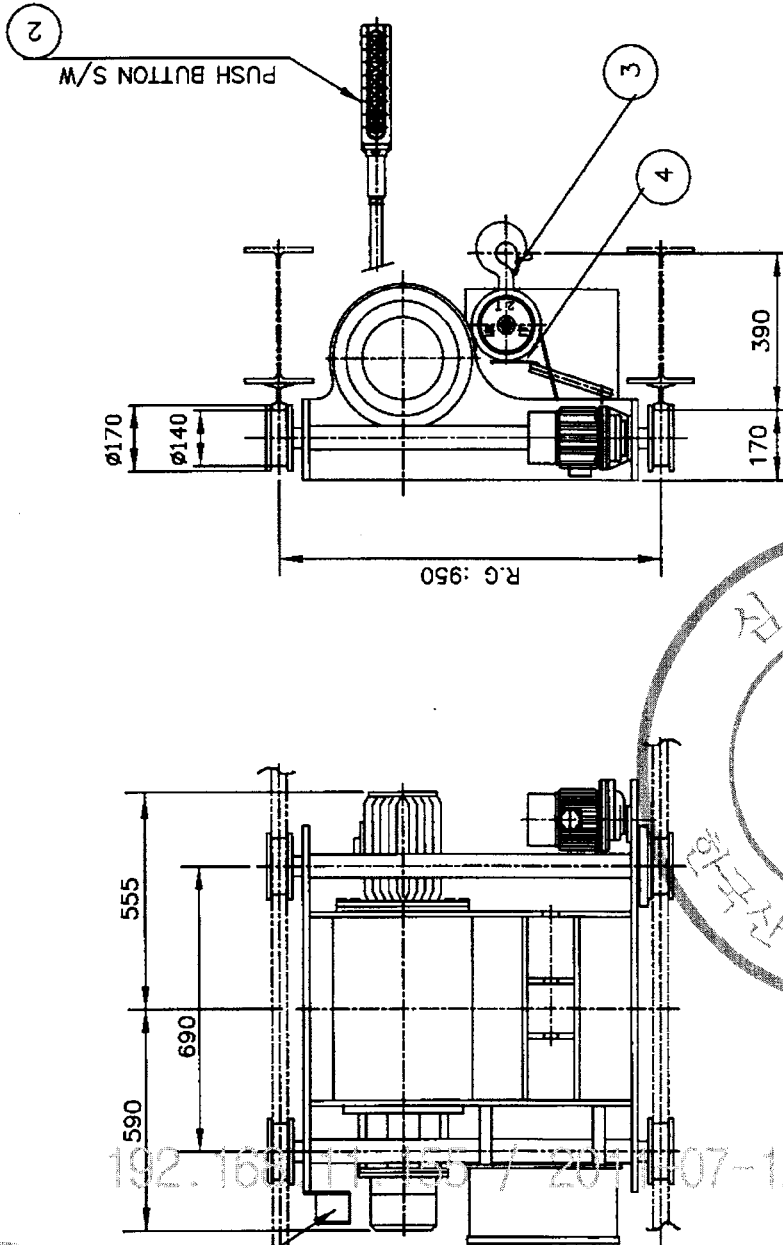


SPECIFICATION		
RATED LOAD	2000	KG
TESTING LOAD	2500	KG
LIFT	6	M
RATING	30	MIN
HOISTING	SPEED	10 M/MIN
	MOTOR	3.7 KW x 4 P
	SPEED	5 M/MIN
	MOTOR	1.8 KW x 8 P
TRAVERSING	SPEED	24 M/MIN
	MOTOR	0.75 KW x 4 P
	SPEED	16 M/MIN
	MOTOR	0.5 KW x 6 P
	SPEED	24 1/2 M/MIN
	MOTOR	0.8/0.4 KW x 4/8 P
	SPEED	16/8 M/MIN
	MOTOR	0.5/0.25 KW x 6/12 P
WIRE ROPE	(6x19) Ø8 x 4 FALLS	
POWER SOURCE	AC3Ø 220V(380,440,460,480)V 60Hz	
COLOR	10 B 3/5	
WEIGHT	395 KG	

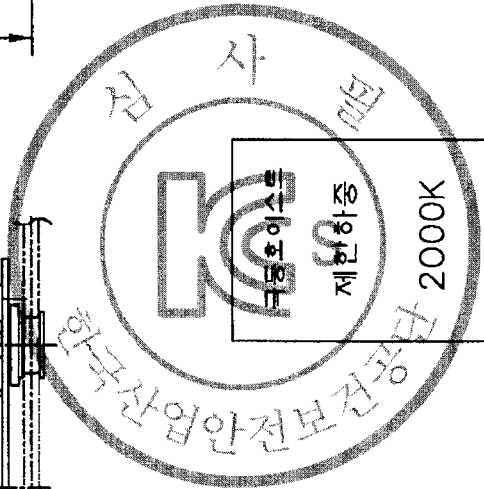[illegible]

VIEW A

SPECIFICATION				
RATED LOAD		2000		KG
TESTING LOAD		2500		KG
LIFT		9		M
RATING		30		MIN
HOISTING	HIGH	SPEED	10 M/MIN	
		MOTOR	3.7 KW x 4 P	
LOW	SPEED	5 M/MIN		
		MOTOR	1.8 KW x 8 P	
HIGH	SPEED	24 M/MIN		
		MOTOR	0.75 KW x 4 P	
LOW	SPEED	16 M/MIN		
		MOTOR	0.5 KW x 6 P	
DUAL HIGH	SPEED	24/12 M/MIN		
		MOTOR	0.8/0.4 KW x 4/8 P	
DUAL LOW	SPEED	16/8 M/MIN		
		MOTOR	0.5/0.25 KW x 6/12 P	
WIRE ROPE		(6x19) ϕ 8 x 4 FALLS		
POWER SOURCE		AC3 ϕ 220V(380,440,460,480)V 60Hz		
COLOR		10 B 3/5		
WEIGHT		425 KG		

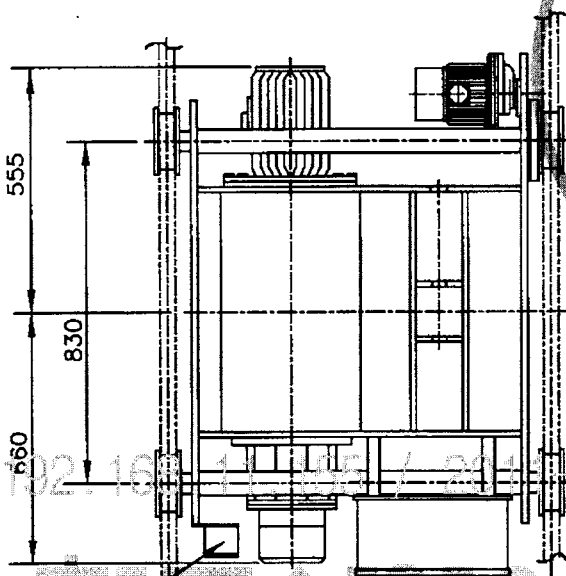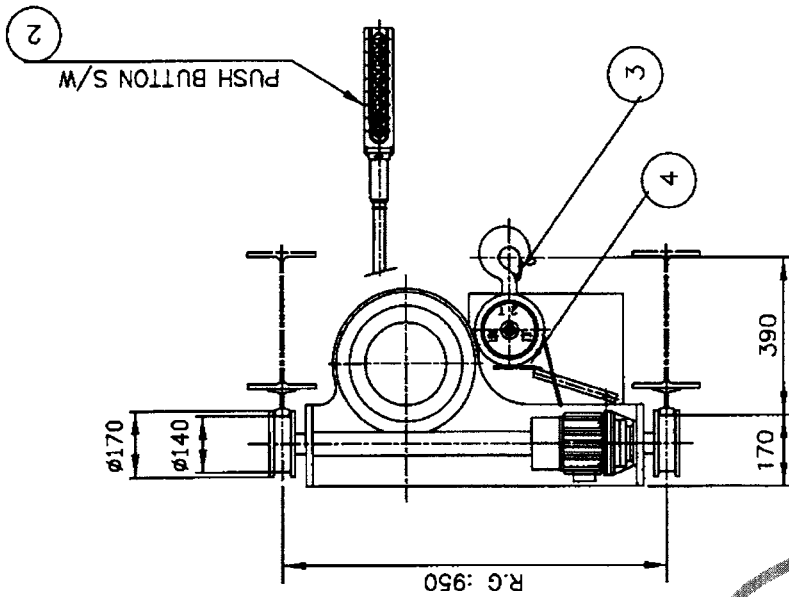


4	UPPER LIMIT S/W	SS400	1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																</
---	-----------------	-------	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

극동호이스트 주식회사
KUK DONG HOIST CO., LTD.






VIEW A

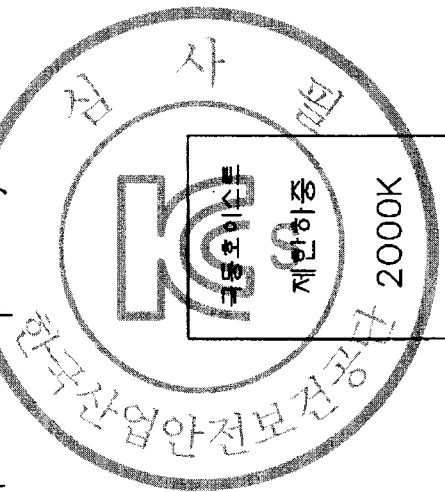

192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27



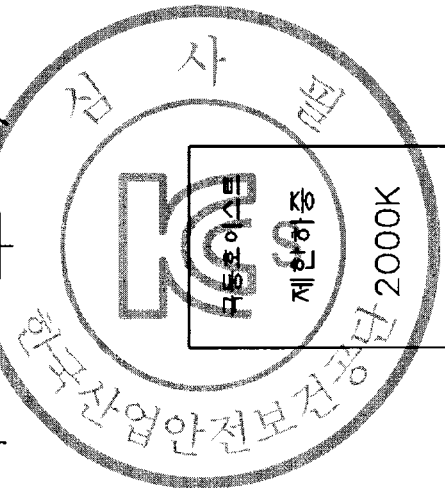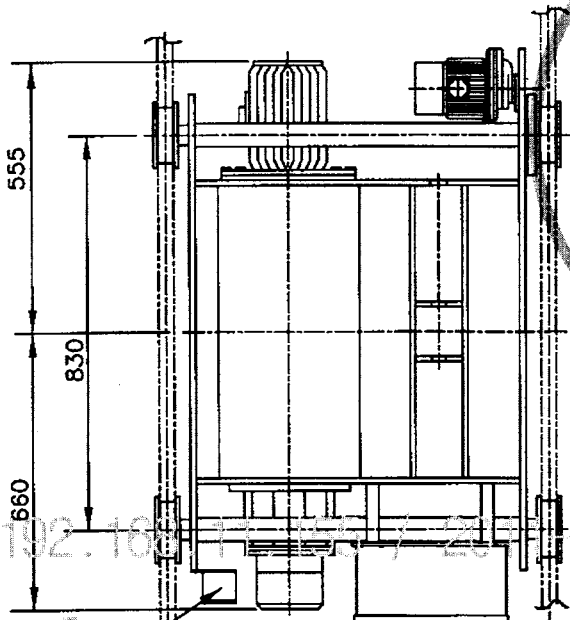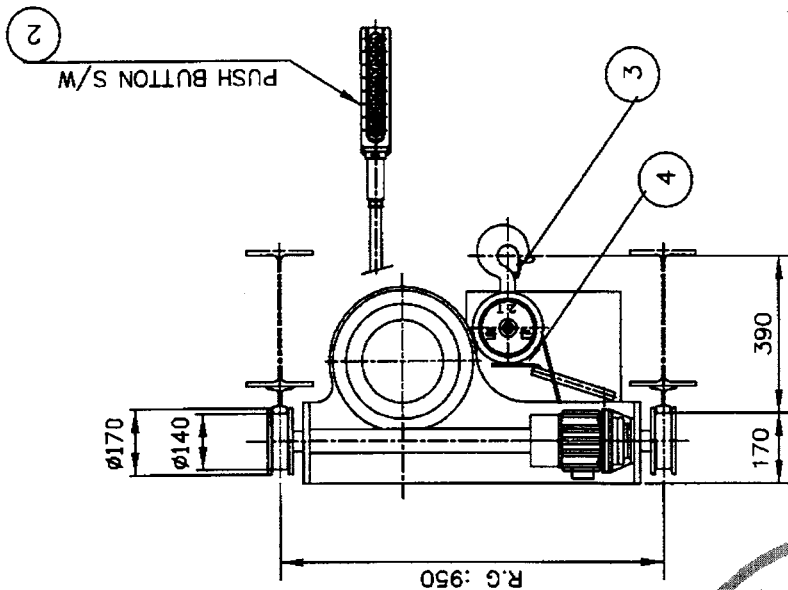

VIEW A

SPECIFICATION			
RATED LOAD		2000	KG
TESTING LOAD		2500	KG
LIFT		12	M
RATING		30	MIN
HOISTING	HIGH	SPEED	10 M/MIN
		MOTOR	3.7 KW x 4 P
	LOW	SPEED	5 M/MIN
		MOTOR	1.8 KW x 8 P
TRAVERSING	HIGH	SPEED	24 M/MIN
		MOTOR	0.75 KW x 4 P
	LOW	SPEED	16 M/MIN
		MOTOR	0.5 KW x 6 P
	DUAL	SPEED	24 1/2 M/MIN
	HIGH	MOTOR	0.8/0.4 KW x 4/5 P
	DUAL	SPEED	16/8 M/MIN
	LOW	MOTOR	0.5/0.25 KW x 6/12 P
WIRE ROPE	(6x19) Ø8 x 4 FALLS		
POWER SOURCE	AC3Ø 220V(380,440,460,480)V 60Hz		
COLOR	10 B 3/5		
WEIGHT	460 KG		

4	UPPER LIMIT S/W	SS400		1							
3	SAFETY LATCH	SS400		1							
2	EMERGENCY S/W	—		1							
1	LOAD LIMITER	—		1							
NO.	DESCRIPTION	MTL	SUB CITY	TOTAL	SUB WEIGHT(Kg)	TOTAL	REMARKS.				
							DATE				
							DIM mm				
PROJECT		KD 2 DL (12M)					SCALE		PROJECTION		
TITLE							ARRANGEMENT DRAWING FOR HOIST		A3/15		3rd
DRAWN	DESIGNED	CHECKED	APPROVED	REF. DRAWING							
 KID 동호이스트 주식회사 KUK DONG HOIST CO., LTD.				SHEET No.		DWG No.		KD2DL — 1200			

KDSM0001

192.168.11.155 / 2011-07-12 14:37:27

[illegible]

ELECTRICAL SYMBOL LIST

DESCRIPTION	SYMBOLS	DESCRIPTION	SYMBOLS	DESCRIPTION	SYMBOLS	DESCRIPTION	SYMBOLS
WIRE INTERNAL TO ENCLOSURE		CONTROLLER OR REMOTE CONTROLLER CONTACTOR		SOLENOID COIL		FLOOD LIGHTING	
WIRE EXTERNAL TO ENCLOSURE		UPPER LIMIT SWITCH (LS-II)		RESISTOR		RECEPTACLE	
WIRE NOT CONNECTED		THERMAL RELAY		VARIABLE RESISTOR			
WIRE CONNECTED		PILOT(SIGNAL) LAMP		SLIP RING			
TERMINAL		ROTARY LAMP		CABLE REEL			
GROUND (EARTH)		WARNING SIREN		SPACE HEATER			
PLUG & RECEPTACLE		BUZZER		SURGE ABSORBER			
MAGNETIC CONTACTOR COIL		AMMETER		LOAD CELL			
AUX. RELAY COIL		VOLT METER		BALLAST WITH RECEPTACLE			
TIMER COIL		FLOODING LAMP		FAN			

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
KDSM0002																			
ADP'S NO.																			
DRAWING																			
DESIGN																			
CHECKED																			
APPROVED																			
SCALE																			
DATE																			
ORDER NO.																			
CUSTOMER																			
DRAWING TITLE																			
SYMBOL LIST 2/2																			
REVISEMENTS																			
CHK.																			
APP.																			
DATE																			
DWG. NO																			
KDSM00002																			

ELECTRICAL SPECIFICATION

POWER SOURCE : AC 3Φ 220V, 380V, 440V, 460V, 480V 60Hz

CONTROL SOURCE : AC 1Φ 110V, 120V 60Hz

OBJECT	MOTOR OUTPUT	220V		380V		440V	460V	480V	440, 460, 480V	REMARK
		STATOR CURRENT	1st CABLE SIZE	STATOR CURRENT	1st CABLE SIZE	STATOR CURRENT	STATOR CURRENT	STATOR CURRENT	1st CABLE SIZE	
MAIN HOIST	HIGH	3.7KW x 4P 30 MIN	16.00 A	4.0 sq	9.30 A	8.0 A	7.7 A	7.3 A	4.0 sq	DC MAG. BRAKE
	LOW	1.8KW x 8P 30 MIN	11.00 A	4.0 sq	6.40 A	5.5 A	5.3 A	5.1 A	4.0 sq	DC MAG. BRAKE
TRAVERSING	HIGH	0.75KW x 4P 30 MIN	4.10 A	4.0 sq	2.40 A	2.00 A	2.00 A	1.90 A	4.0 sq	DC MAG. BRAKE
	LOW	0.5KW x 6P 30 MIN	3.20 A	4.0 sq	2.00 A	1.70 A	1.70 A	1.60 A	4.0 sq	DC MAG. BRAKE
CONTROL CIRCUIT		2 A	2.5 sq	2 A	2.5 sq	2 A	2 A	2 A	2.5 sq	
LIGHTING & ACC'Y CIRCUIT										
SUB TOTAL (PEAK LOAD)		HIGH	22.10 A	6.0 sq	13.70 A	12.00 A	11.70 A	11.20 A	4.0 sq	I(A)=M/H + T/S + ASS'Y
SUB TOTAL (NORMAL LOAD)		LOW	16.20 A	6.0 sq	10.40 A	9.20 A	9.00 A	8.70 A	4.0 sq	I(A)=M/H + T/S + ASS'Y

* 위 계산은 HIGH(MAX.)일때와 LOW(MIN.)일때만 계산한것임.

* 위 계산은 LIFT 6M, 9M, 12M에 적용


NO	DESCRIPTION	CABLE SIZE
1	MAIN EARTH LINE	USER SCOPE
2	POWER SOURCE	USER SCOPE
3	TROLLEY BAR	USER SCOPE
4	POWER SOURCE WITH EARTH	USER SCOPE
5	HOST POWER SOURCE WITH EARTH	VCT 6SQ x 1C
6	HOISTING MOTOR WITH EARTH	VCT 4.0SQ x 1C
8	TRAVERSING MOTOR WITH EARTH	VCT 4.0SQ x 1C

* CV CABLE 4C중 1C는 EARTH로 사용함.


- NOTE -
- 전동기 외함, 제어반의 프레임 등은 접지하여 그 접지 저항은
400V 미만 : 100옴 이하임지.(3층 경)
400V 이상 : 10옴 이하임지.(특 3층접지)
2.MAIN S/W BOX는 3층 접지 요.

----- USER SCOPE

----- KUKDONG SCOPE

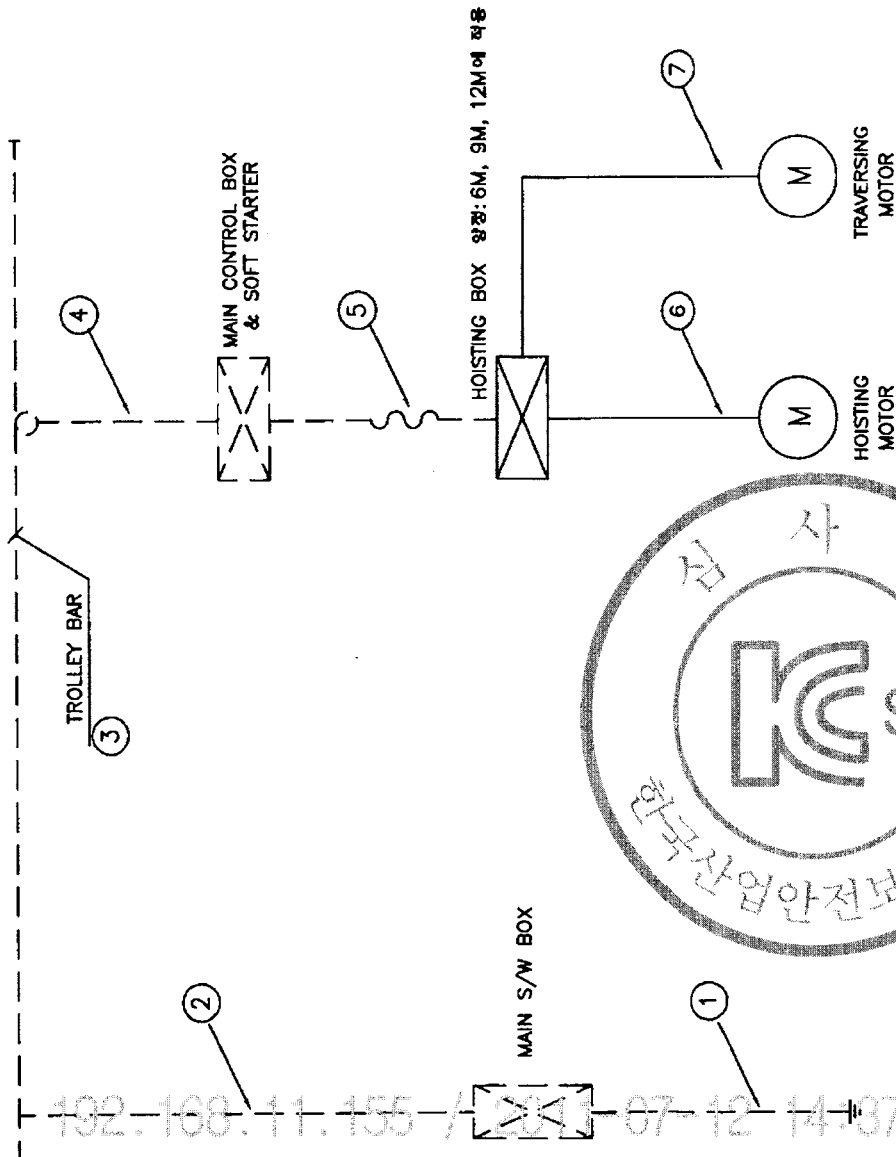

	국동호이스트 주식회사 KUK DONG HOIST CO., LTD.		DWG. NO		K02-EC000	
DRAWING	DESIGN	CHECKED	APPROVED	SCALE	DATE	ORDER NO.
CUSTOMER						
DRAWING TITLE		EARTH DETAILS DRAWING				
REVISIONS		CHK.	APP.			
DATE						





*3중 점지공사 100Ω 이하 (AC 3PH 400V 미만)
*4중 점지공사 100Ω 이하 (AC 3PH 400V 이상)

NO	CABLE				REMARK
	TYPE	SIZE		TYPE	
		220V	380V		
1	VCT	4.0sqx4c	4.0sqx5c	VCT	440V,460V,480V 4.0sqx5c
2	VCT	4.0sqx4c+2.5sqx3c	4.0sqx4c+2.5sqx3c	VCT	4.0sqx4c+2.5sqx3c
3	VFCT	6.0sqx4c	4.0sqx4c	VFCT	4.0sqx4c

[illegible]

NO	DESCRIPTION	MT'L	REMARKS
1	PANEL CASE	SPC	1.6t
2	PANEL COVER	SPC	1.6t
3	HINGE	PUR'	
4	CLAMP	PUR'	
5	SPONGE	PUR'	

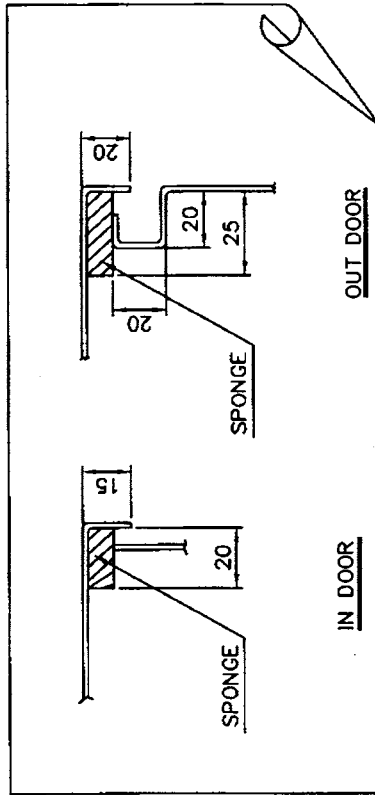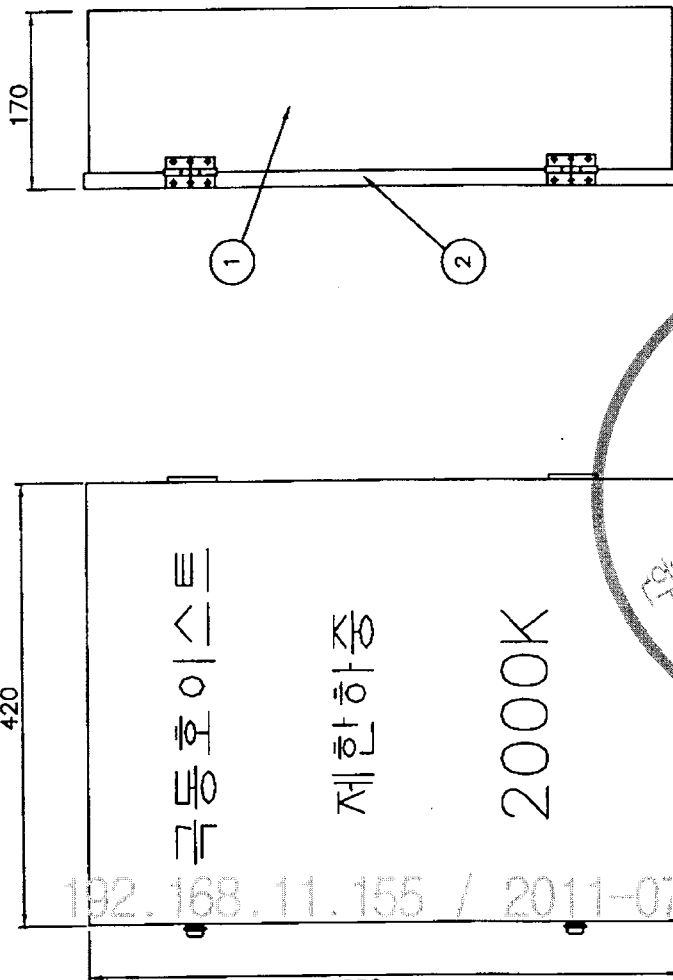

NOTE

1. PROTECTION DEGREE :

- A. INDOOR TYPE : DUST PROOF
- B. OUT DOOR TYPE : SPLASH PROOF

2. FINAL PAINTING COLOR (MUNSELL NO.)

- A. IN SIDE : 10B 3/5
- B. OUT SIDE : 10B 3/5

3. PAINTING THICKNESS : ABOVE 40 μ

4. APPLICATION VOLTAGE : 220V, 380V, 440V, 460V, 480V

5. BOX INSIDE CONTROL CABLE : 2.5sq KIV. HIV


6. 외함 개방 구조는 다음과 같다.

- 1) 외함 개방시 용접부분이 차단되도록 한다.
- 2) 외함 개방 후 충전되어있는 부분은 IP2X 이상의 직접 접촉 방호가 되어있을것.

 극동호이스트 주식회사 KUK DONG HOIST CO., LTD.	APP	CHK	DATE	SHEET NO	QTY	PROJECT DL 2TON	HOIST CONTROL BOX	DWG NO.
							LAY OUT DRAWING	KD2EB001

192.168.11.155 / 2011-07-12 14:37:27


192.168.11.155 / 2011-07-12 14:37:27




한국산업안전보건공단
KOSHA



SELECTION	VOLAGE	F11	F12	F13	MCCB100
	220V	2A	3A	33AF/30AT	
	380V	1A	3A	33AF/15AT	
	440V	1A	3A	33AF/15AT	
	480V	1A	3A	33AF/15AT	
	480V	1A	3A	33AF/15AT	

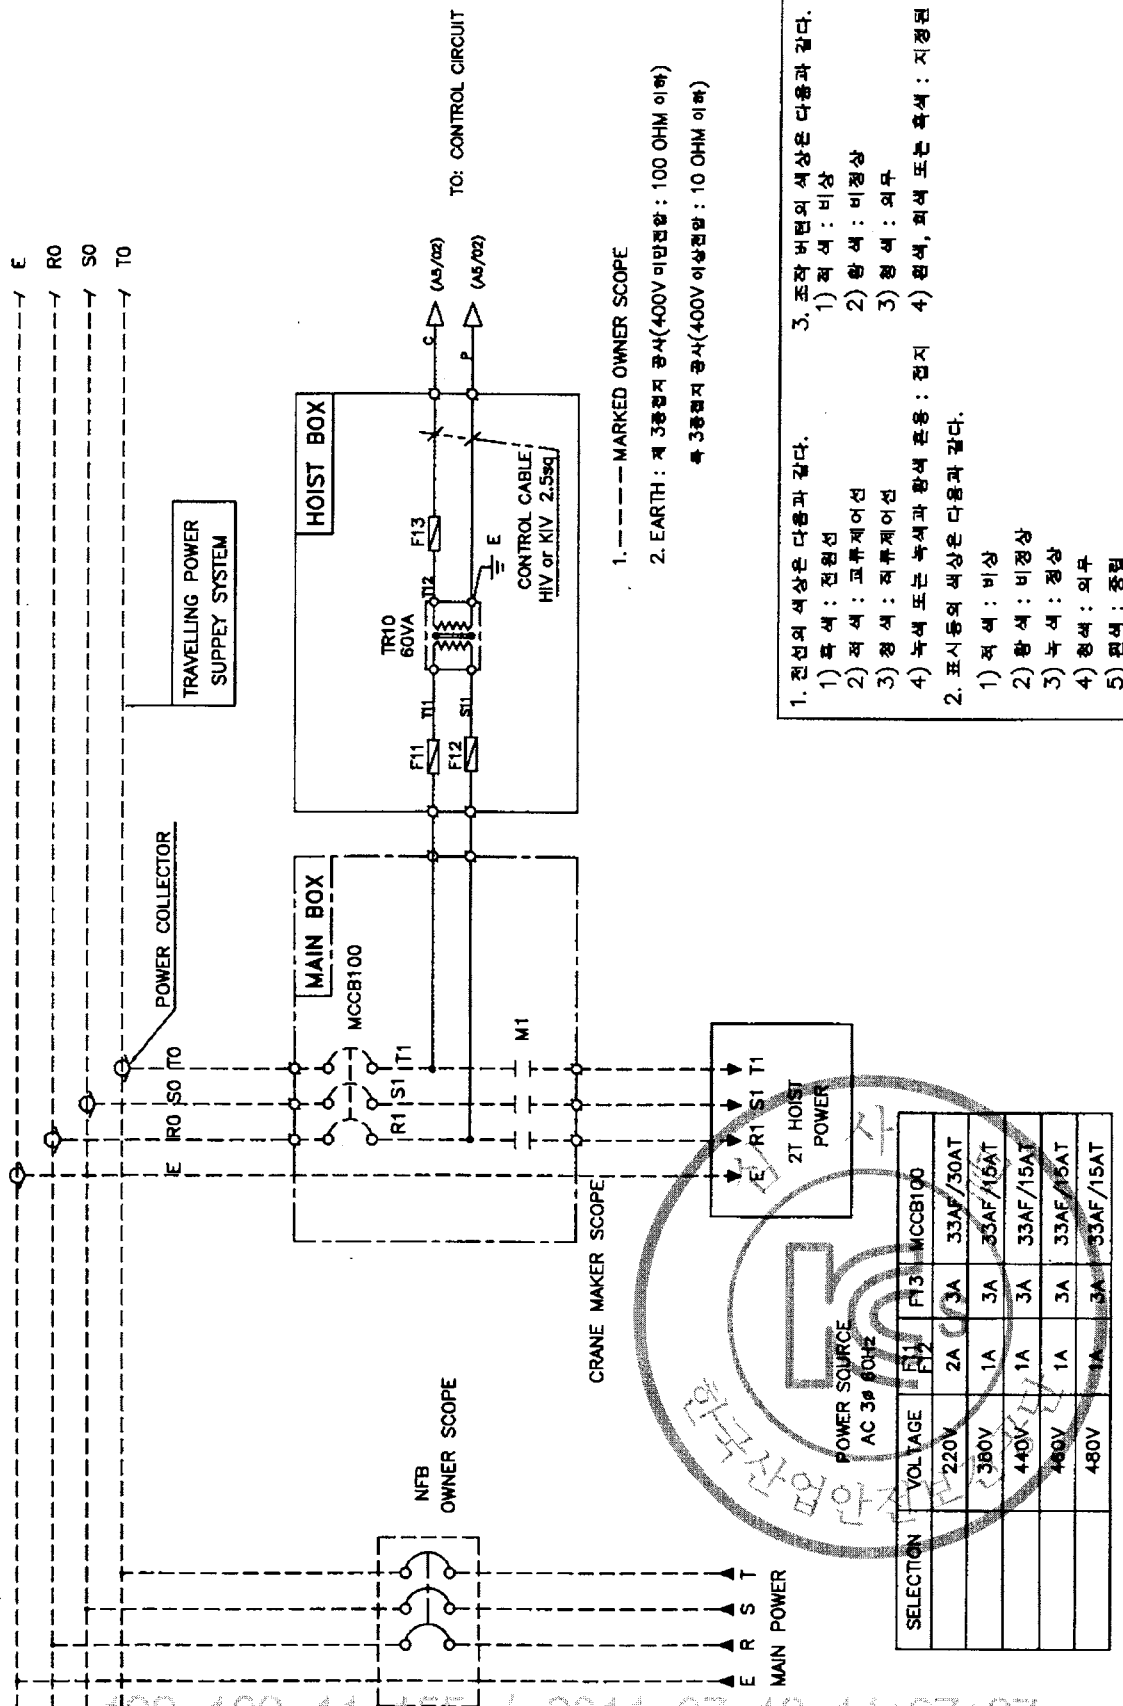

380

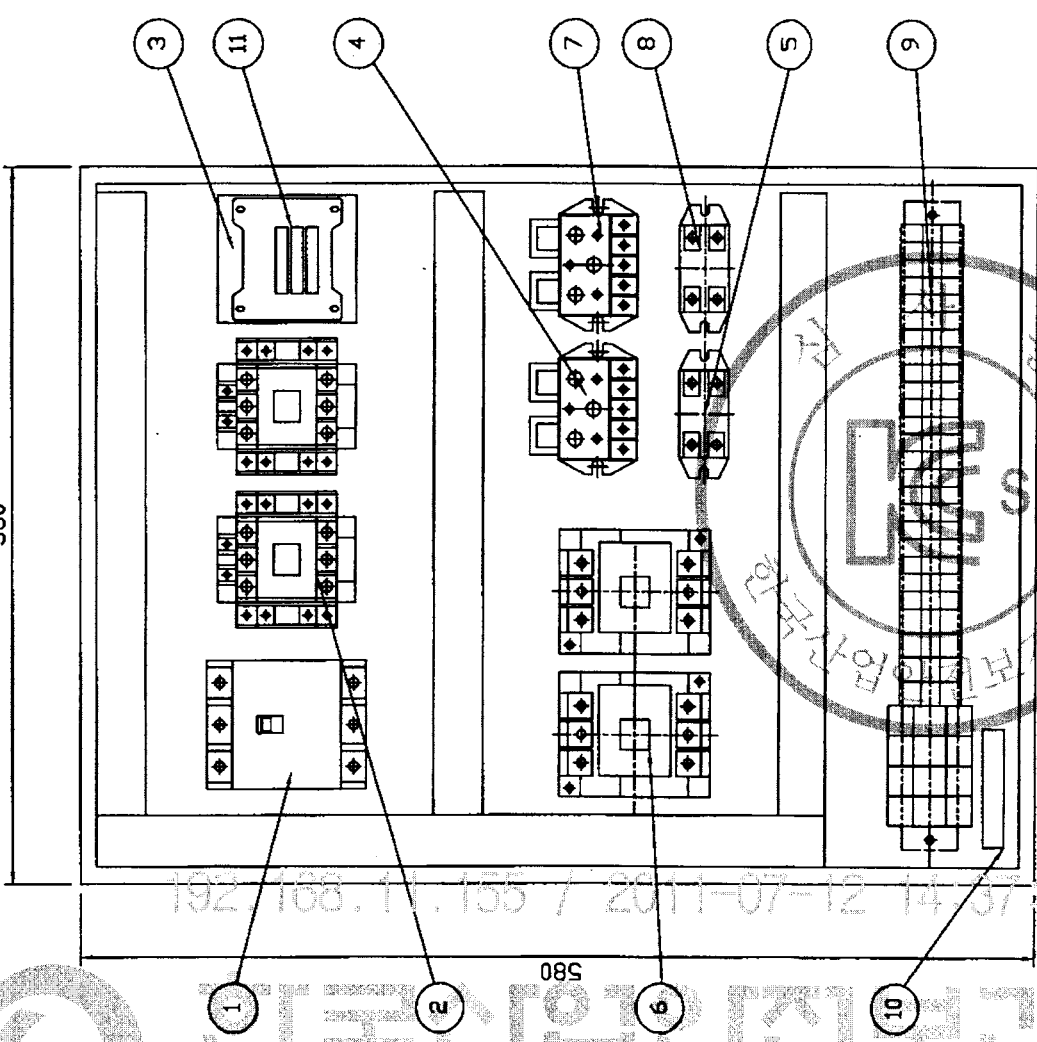

NOTE

1. UPPER LIMIT LS-1,LS-2의 전원 허용 전류 : AC 600V 75A
2. POWER SOURCE : AC 3φ 220V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/30AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-40P	2	DEARYUK
3	TR1	TRANSFORMER	220V/110.120V/100VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	3tx20x50	1	
11	F11,12,(13)	FUSE	2A . (3A)	2(1)	PUR

NOTE

1. 전선의 색상은 다음과 같다.
1) 흑색 : 교류 및 직류 전원선
2) 적색 : 교류 제어선
3) 파랑색 : 외부 전원에서 공급되는 연동장치 제어선
4) 녹색 또는 노색과 황색 혼합 : 접지선
2. CABLE MATERIAL : KIV OR EQUIVALENT
MIN SIZE : 2.5sq
3. 제어용 전선 : 2.5mm KIV,HIV
4. 제어시 다소 변경 될수있음.
5. 외함 개방구조는 다음과 같음 것.
- 1) 외함 개방시 충전부분이 차단되도록 함 것.
- 2) 외함 개방후 충전되어있는 부분은 IP2X 이상의 차단 접속 방호가 되어있을 것.

NO.	DESCRIPTION	MTL	QTY		SUB	TOTAL	WEIGHT(Kg)	REMARKS.
			QTY	QTY				
PROJECT								
DATE								
mm								
SCALE								
PROJECTION								
A3/3								
REF. DRAWING								
DRAWN								
DESIGNED								
CHECKED								
APPROVED								
SHEET No.								
DWC No.								
KID								
KUK DONG HOIST CO., LTD.								
K002BA21								




3. EARTH TERMINAL RESISTANCE 0.018 Ω

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

192.168.11.155 / 2011-07-14 14:37

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT																			
TRAVERSING MOTION																			
ADR'S NO.																			
C2																			

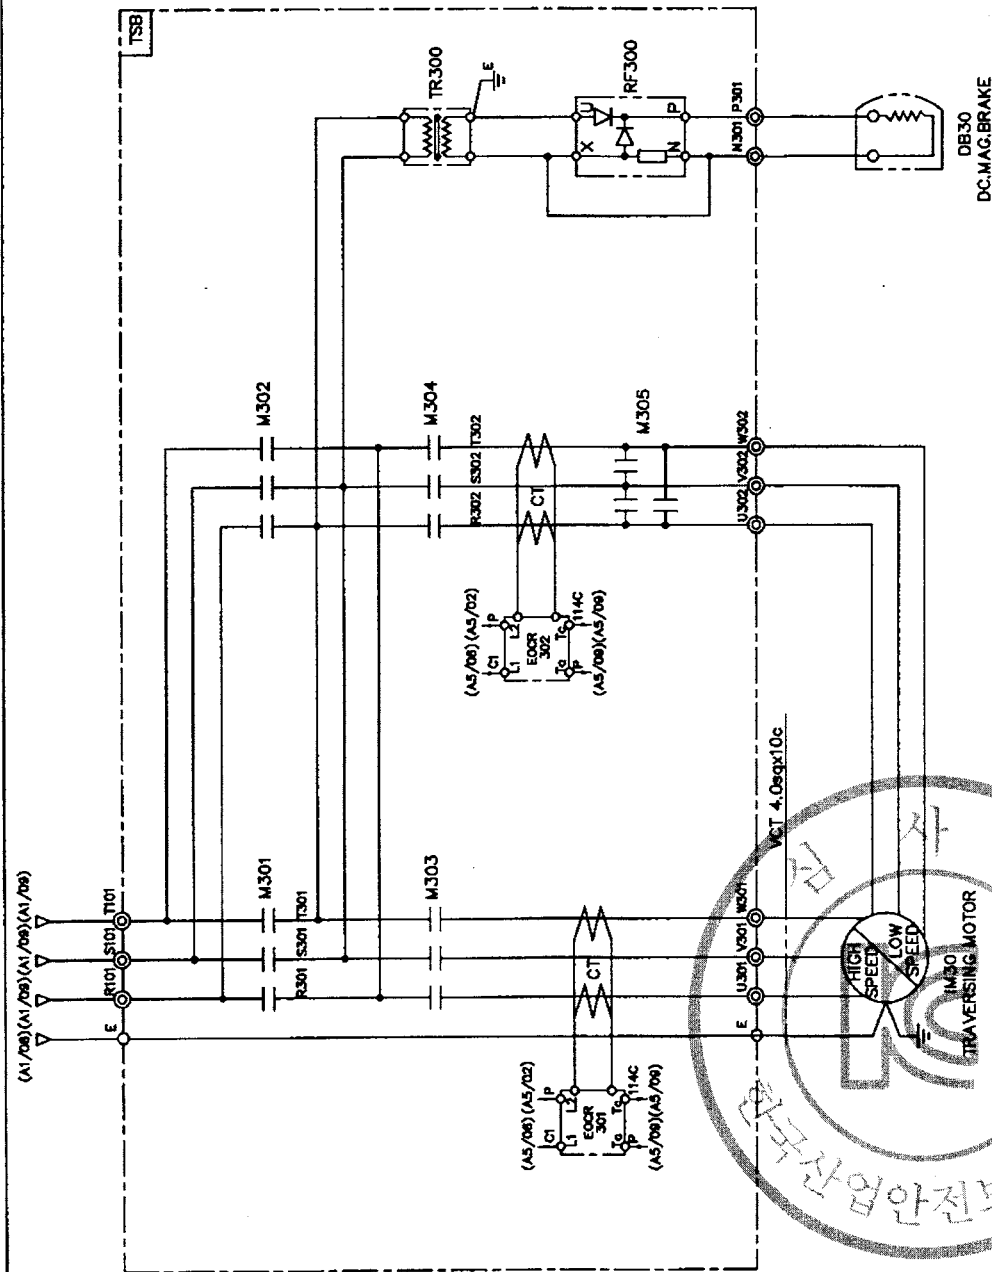

SPECIFICATION SYMBOLS DESCRIPTION		TRAVERSING MOTOR		MAGNET CONTACTOR		SILICON RECTIFIER		ELECTRIC OVER CURRENT RELAY		TRANSFORMER	
IM 30		M301, M302, M303, M304, M305		RF 300		EOCR 301,302		TR300			
220V		0.5/0.25KWx6, 1/2P AC3PH 220V 60Hz		DOC-22P		SR-30		AC220/220V, 300VA			
220V		0.8/0.4KWx4/8P AC3PH 220V 60Hz		DOC-22R		SR-30		AC220/220V, 300VA			
SELECTION MAKER		KUKDONG		DAERYUK		ASECO		SHINHAN			
CUSTOMER				DRAWING		DESIGN		CHECKED		APPROVED	
DRAWING TITLE		TRAVERSING POWER CONTROL CIRCUIT		SCALE		NONE		DATE			
REVISIONS				DWG. NO		K002E25					
CHK. APP.				KUKDONG HOIST CO., LTD.							
DATE											

192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27




NOTE 1. 전신의 여상은 다음과 같다.

3. 제어용 전선 : 2.5mm K|V,H|V

NOTE

1. UPPER LIMIT LS-1, LS-2의 전압 허용 전압. 용량 : AC 600V 75A
2. POWER SOURCE : AC 3 ϕ 380V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

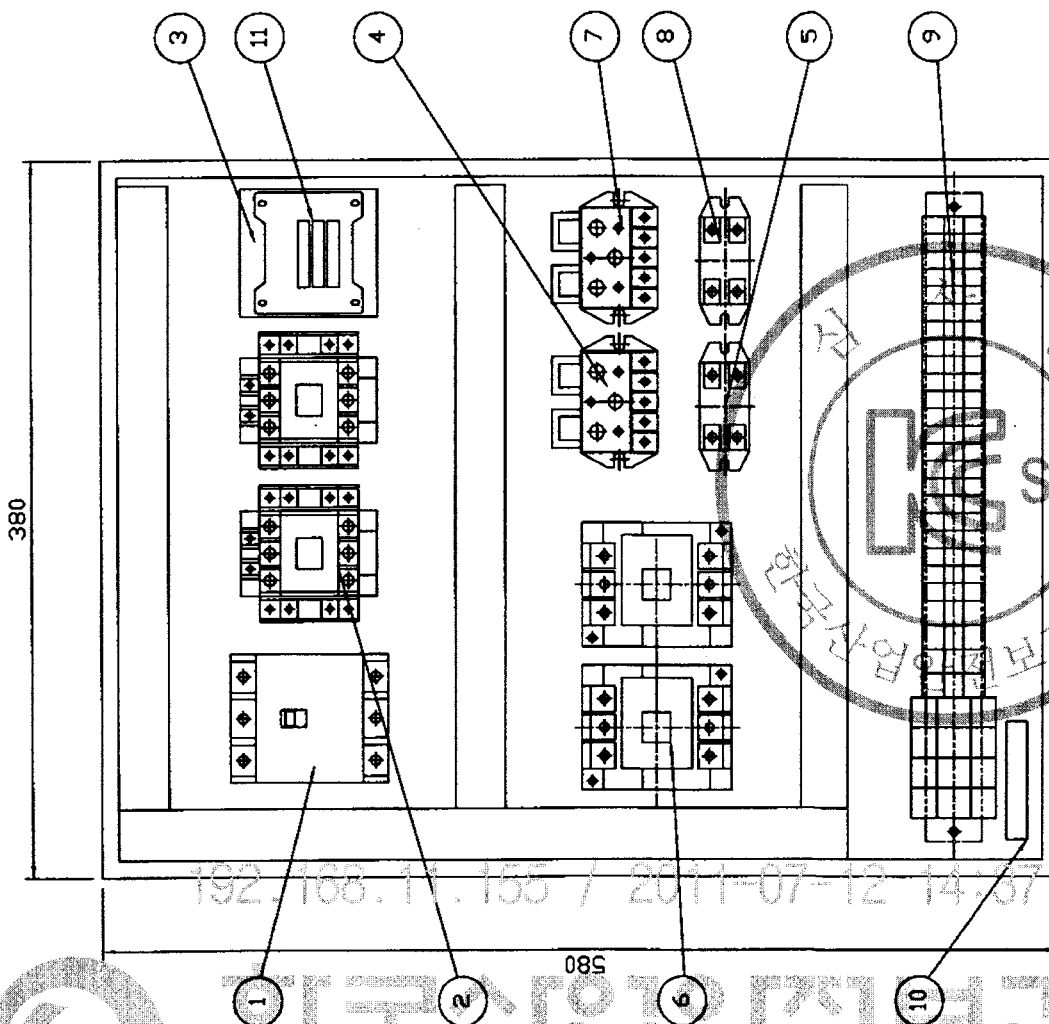

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/15AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	380V/110,120V/60VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	3tx20x50	1	
11	F11,12,(13)	FUSE	1A , (2A)	2(1)	PUR'

NOTE 1. 전선의 예상은 다음과 같다.

- 1) **화액** : 그루 및 자루 집어질때
- 2) **염액** : 그루 제거용
- 3) **주황액** : 외부 집어에서 집어질때
- 4) **녹색액** : 내부 황색변용 : 집어질

2. CABLE MATERIAL : KIV OR EQUIVALENT

MIN SIZE : 2.5sq


3. 제어용 전선 : 2.5mm KIV,HIN
4. 제작시 다소 변경 될수있음.
5. 외함 개방구조는 다음과 같을것.

- 1) 외함 개방시 용전부본이 차단되도록 함.
- 2) 외함 개방후 용전되어있는 부본은 IP2X

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----


NOTE

1. UPPER LIMIT LS-1,LS-2의 접점 허용 전류, 용량 : AC 600V 75A
2. POWER SOURCE : AC 3 ϕ 380V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

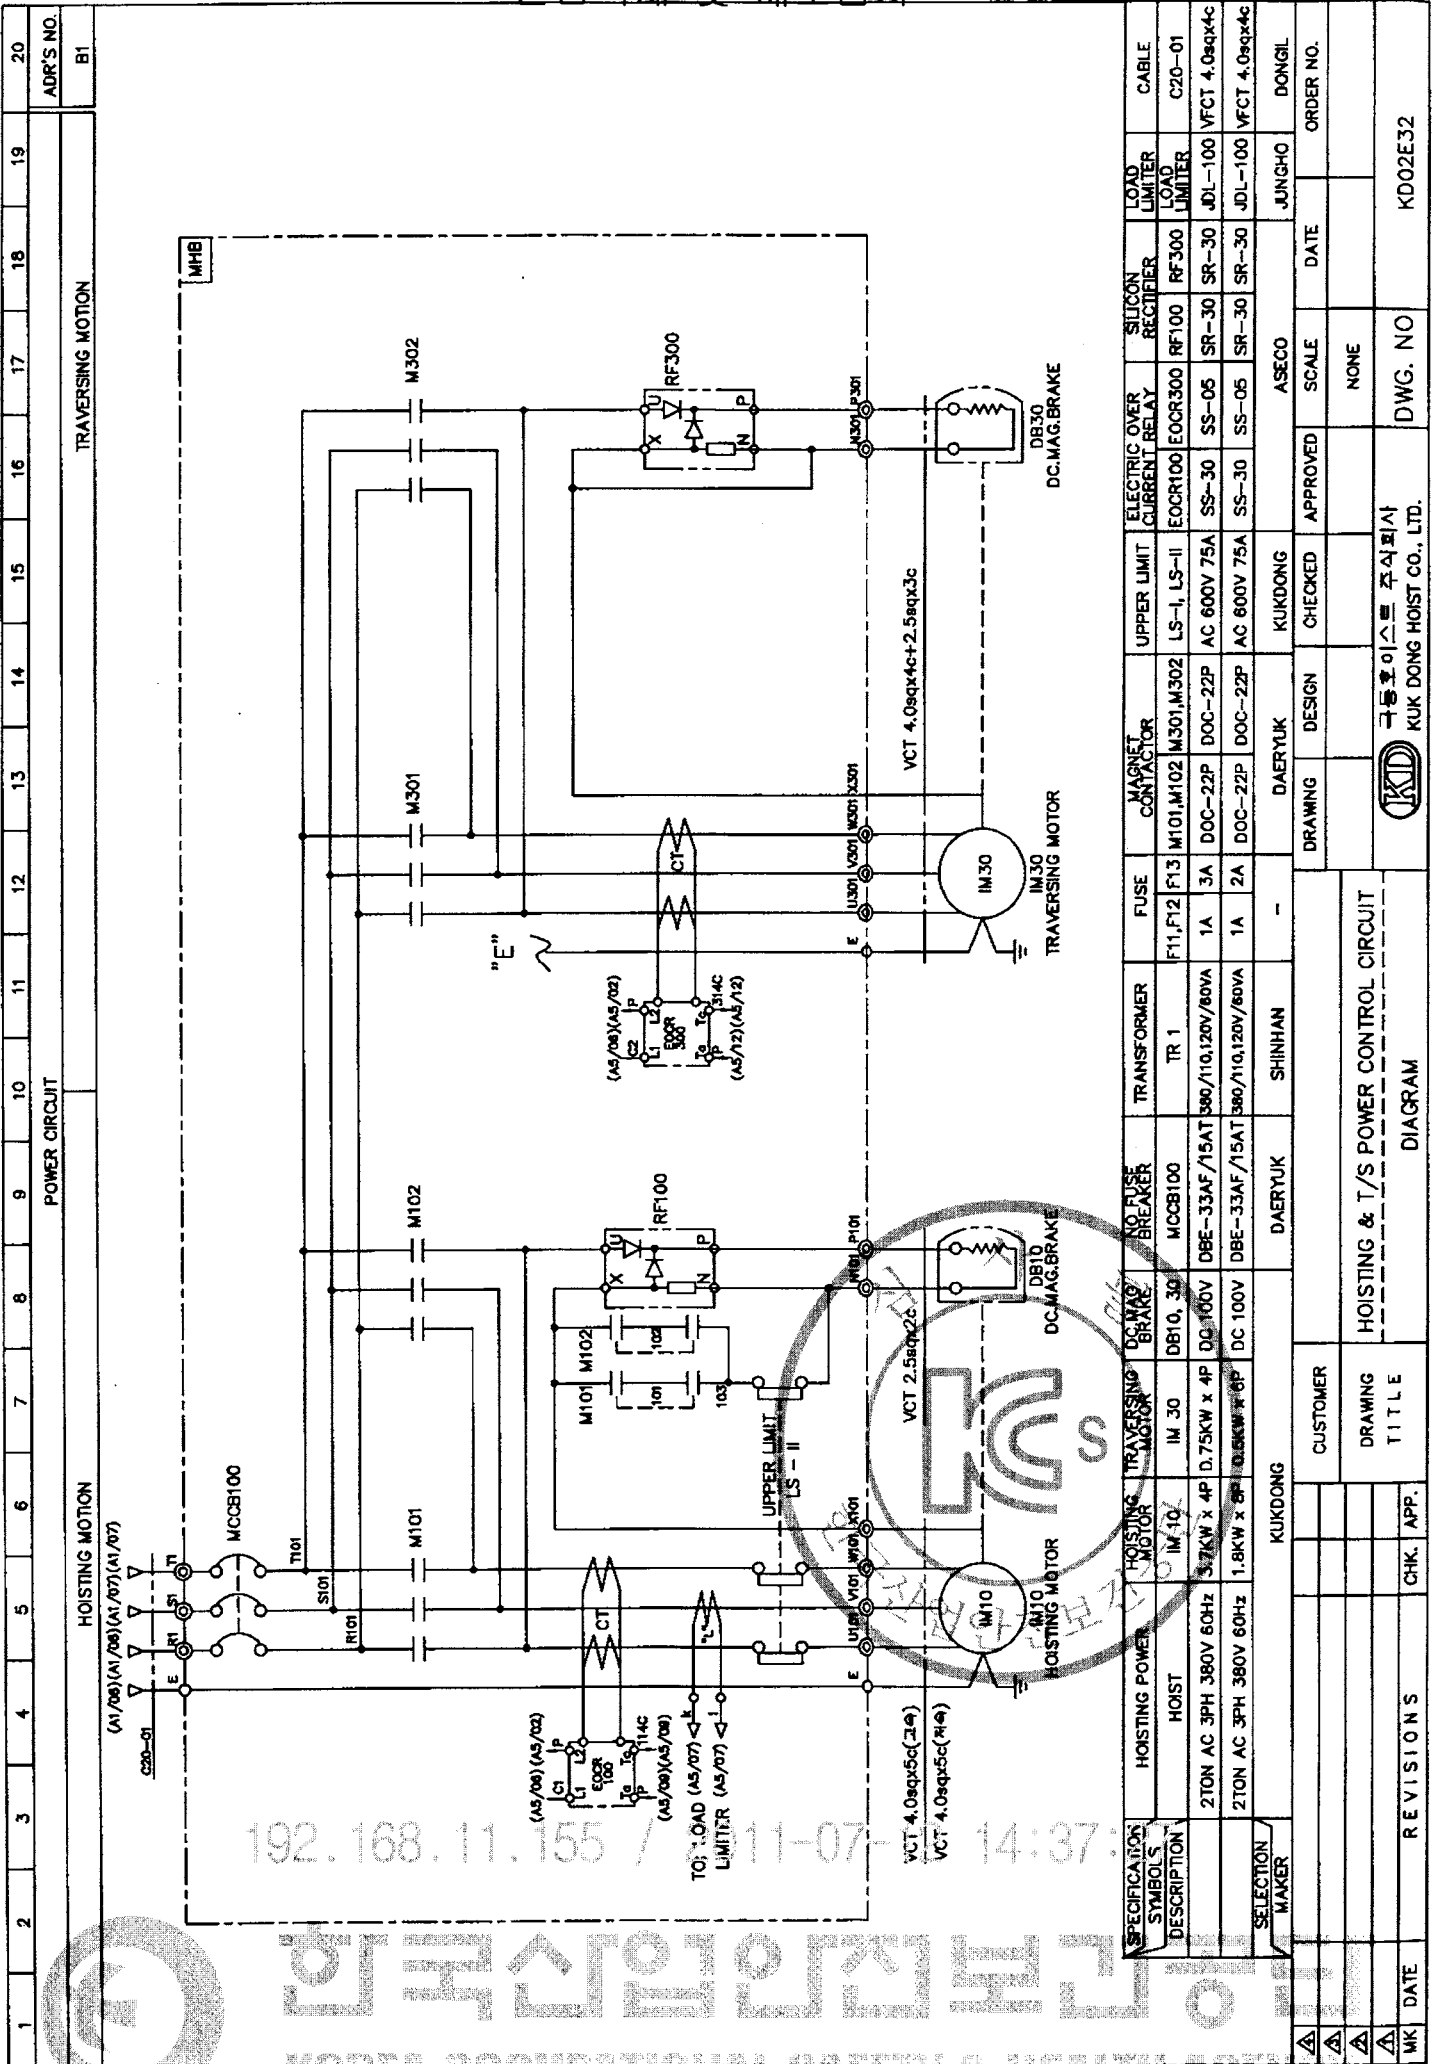


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT										TRAVERSING MOTION									
HOISTING MOTION										TRAVERSING MOTION									
SPECIFICATION SYMBOL'S										CABLE									
DESCRIPTION										LOAD LIMITER									
HOISTING POWER										ELECTRIC OVER CURRENT RELAY									
HOIST										SIICON RECTIFIER									
2TON AC 3PH 380V 60Hz 3.7KW x 4P 1.8KW x 8P										LOAD LIMITER									
2TON AC 3PH 380V 60Hz 1.8KW x 8P										JDL-100 VFCT 4.0sqx4c									
2TON AC 3PH 380V 60Hz 1.8KW x 8P										JDL-100 VFCT 4.0sqx4c									
SELECTION MAKER										JUNGHQ									
KUKDONG										ASECO									
CUSTOMER										DATE									
DRAWING TITLE										NONE									
REVISIONS										DWG. NO									
CHK. APP.										KUK DONG HOIST CO., LTD.									
DATE										K002E32									

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT																			ADR'S NO.
TRAVERSING MOTION																			C2

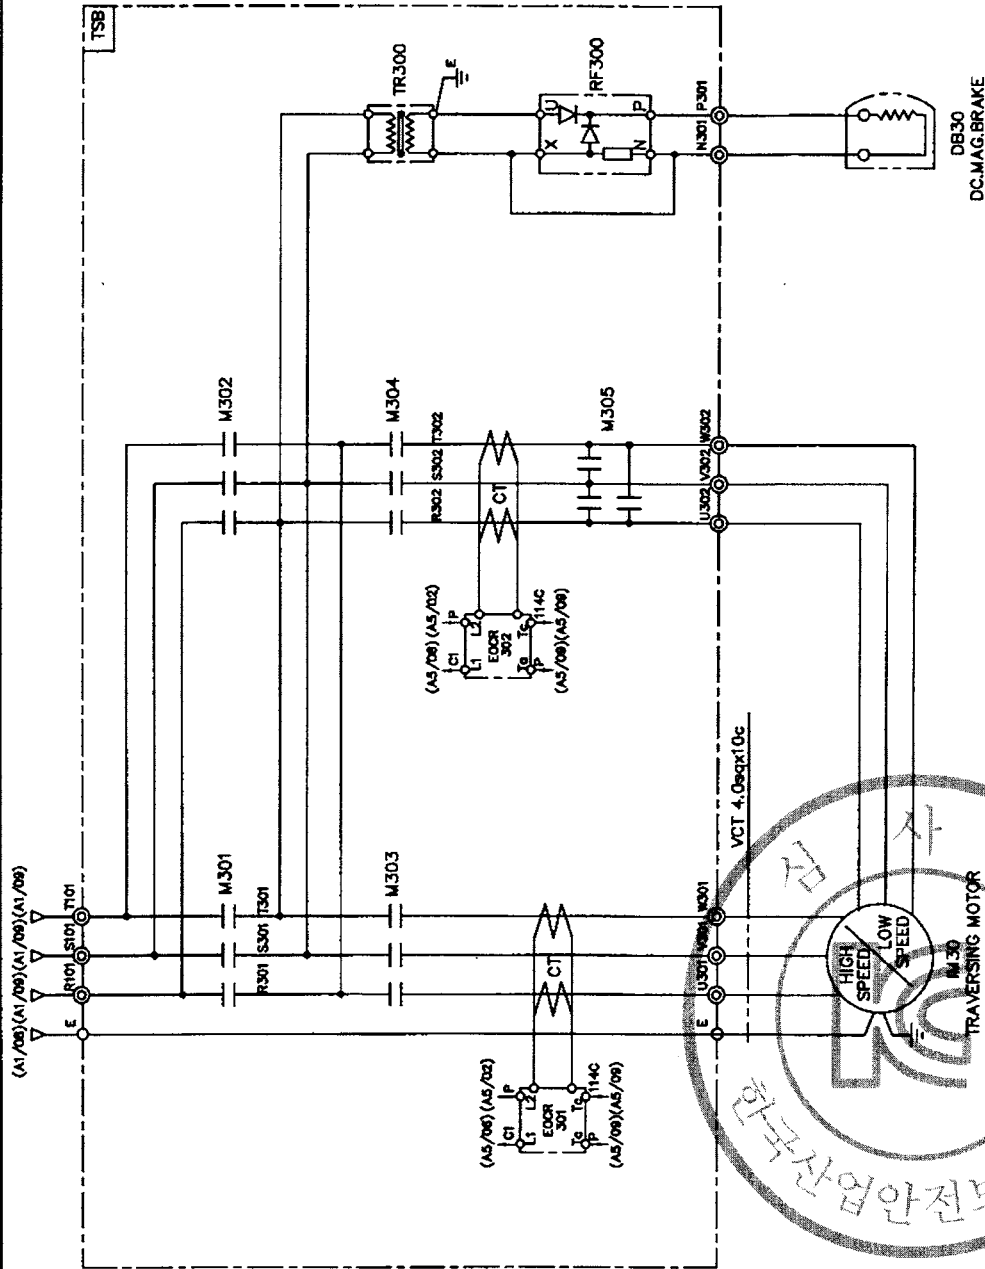

SPECIFICATION SYMBOLS		TRAVERSING MOTOR		DC MAG. BRAKE		MAGNET CONTACTOR		SILICON RECTIFIER		ELECTRIC OVER CURRENT RELAY		TRANSFORMER	
DESCRIPTION		IM 30		DB30		M301, M302, M303		RF 300		EOCR 301,302		TR300	
380V 0.5/025KWx6 1/2P AC3PH 380V 60Hz		AC3PH 380V 60Hz		DC 100V		DOC-22P		SR-30		SS-05		AC380/220V, 300VA	
380V 0.8/04KWx4/8P AC3PH 380V 60Hz		AC3PH 380V 60Hz		DC 100V		DOC-22P		SR-30		SS-05		AC380/220V, 300VA	
SELECTION MAKER		KUKDONG		DAERYUK		ASECO		SHINHAN					
CUSTOMER				DRAWING		DESIGN		CHECKED		APPROVED		SCALE	
DRAWING TITLE		TRAVERSING POWER CONTROL CIRCUIT										NONE	
REVISIONS												DWG. NO	
DATE												KDO2E35	
CHK. APP.													



구동호이스트 주식회사
KUK DONG HOIST CO., LTD.

DIAGRAM

192.168.11.155 / 2011-07-12 14:37:27

한국산업안전보안공사


192.168.11.155 / 2011-07-12 14:37:27

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/15AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	440V/110/120V/60VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	3SA,15A	1	BUMHAN
10		EARTH TERMINAL	3tx20x50	1	
11	F11,12,(13)	FUSE	1A, (3A)	2(1)	PUR'

NOTE

1. 전선의 역상은 다음과 같다.
 - 1) 흑색 : 교류 및 직류 전원선으로
 - 2) 적색 : 교류 제어회로
 - 3) 파랑색 : 외부 전원에서 공급되는 전동장치 제어회로
 - 4) 녹색 또는 녹색과 황색 혼합 : 접지선
2. CABLE MATERIAL : KIV OR EQUIVALENT
MIN SIZE : 2.5sq
3. 제어용 전선 : 2.5mm KIV,HIV
 4. 제어시 디스플레이 필요있음.
 5. 외함 개방구조는 다음과 같을것.
 - 1) 외함 개방시 충전부분이 차단되도록 할것.
 - 2) 외함 개방후 충전되어있는 부분의 직접 접촉 및 방호가 되어있을것.

NO.	DESCRIPTION	MTL	SUB QTY	TOTAL WEIGHT(Kg)	REMARKS.
PROJECT					DATE
TITLE					SCALE
DRAWN					PROJECTION
DESIGNED					3rd
CHECKED					REF. DRAWING
APPROVED					
SHEET No.					DWG No.
KUK DONG HOIST CO., LTD.					KD02BA41

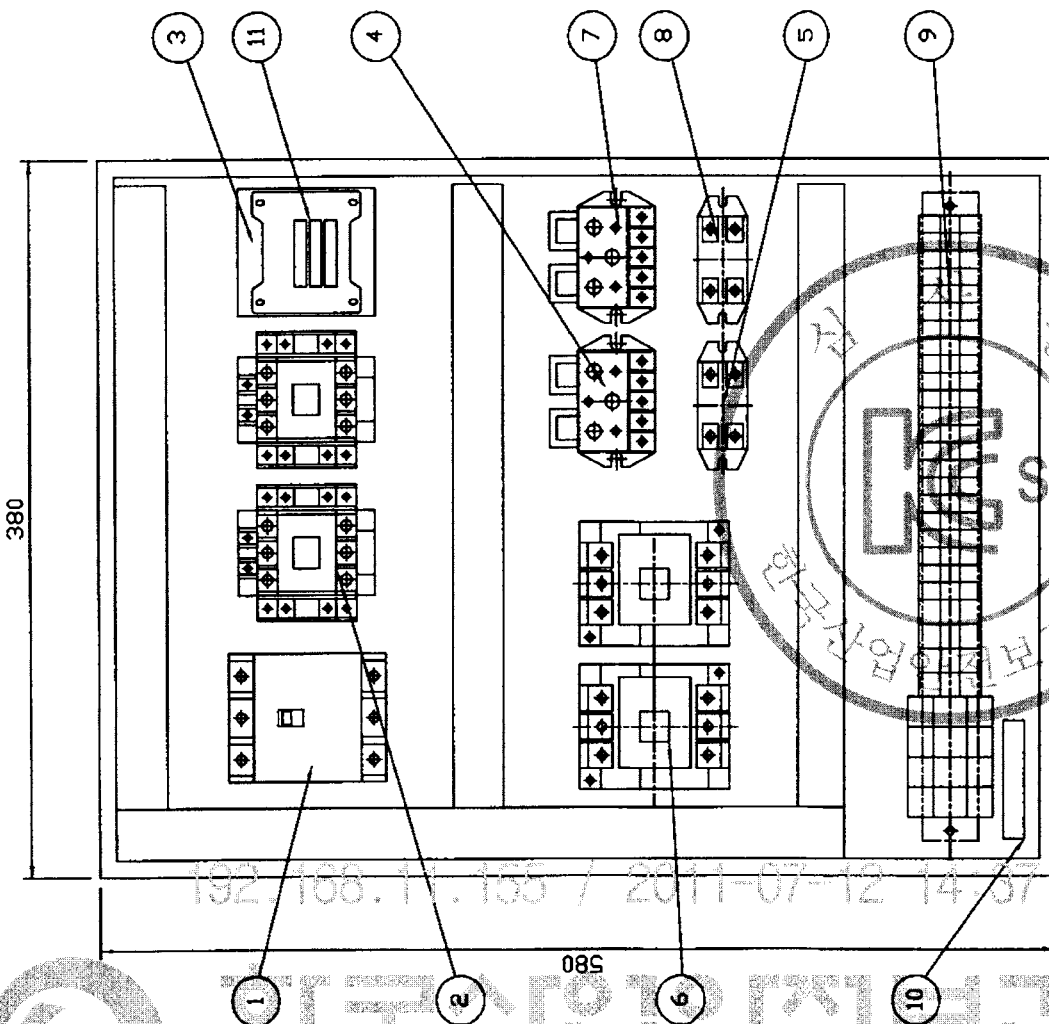

NOTE

1. UPPER LIMIT LS-1,LS-2의 전선 허용 전류, 용량 : AC 600V 75A
2. POWER SOURCE : AC 3φ 440V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/15AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	440V/110,120V/60VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	3tx20x50	1	
11	F11,12,(13)	FUSE	1A, (2A)	2(1)	PUR'

NOTE 1. 전선의 색상은 다음과 같다.

- 1) 흑색 : 교류 및 직류 전원선으로
- 2) 회색 : 교류 제어회로
- 3) 파랑색 : 외부 전원에서 공급되는 연동장치 제어회로
- 4) 녹색 또는 녹색과 황색 혼합 : 접지선

2. CABLE MATERIAL : KIV OR EQUIVALENT

MIN SIZE : 2.5sq


3. 제어용 전선 : 2.5mm KIV,HIV

4. 제어시 다소 변경 될수있음.

5. 외함 개방구조는 다음과 같을것.

1) 외함 개방시 충전부분이 차단되도록 설계 할것.

2) 외함 개방후 충전되어있는 부분에는 IP2X 이상의 직접 접촉 방호가 되어있을것.

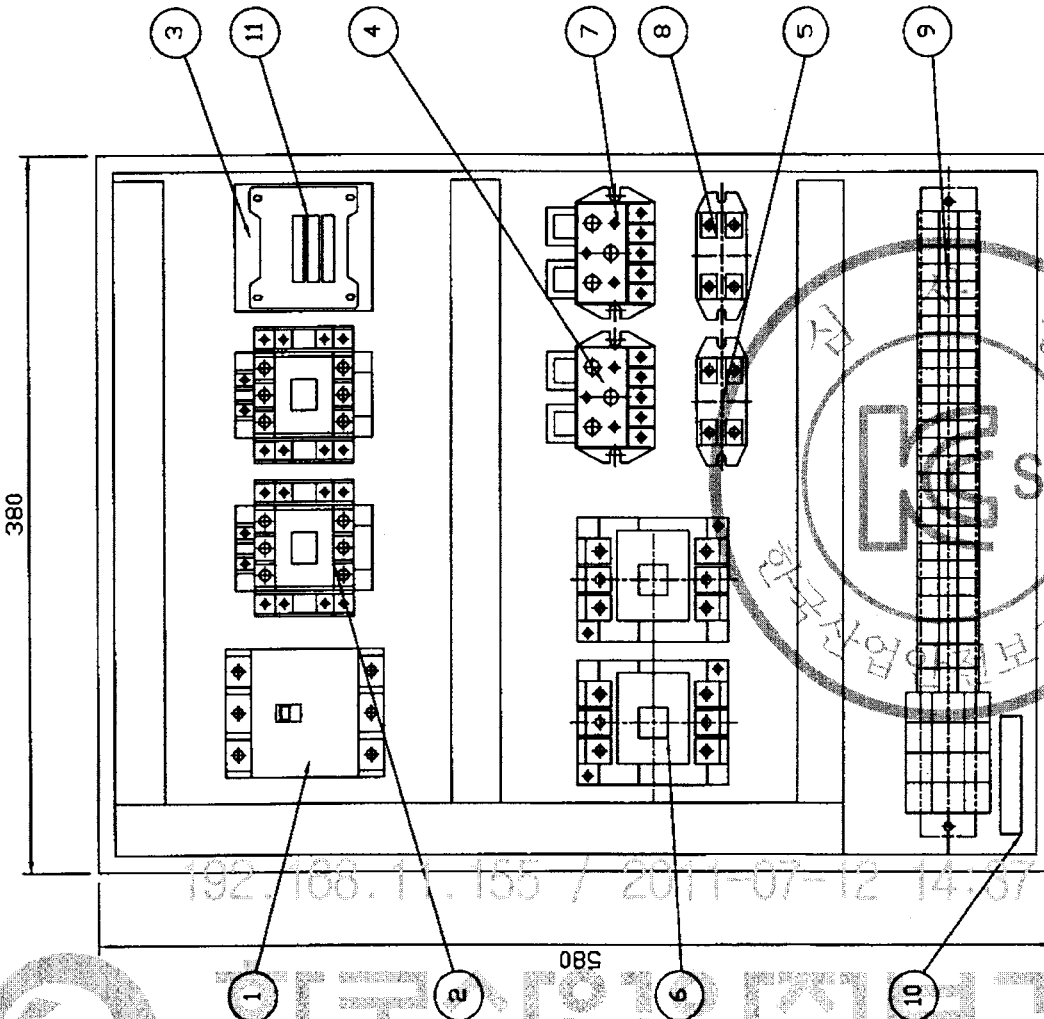

NOTE

1. UPPER LIMIT LS-1,LS-2의 정전 허용 전류, 용량 : AC 600V 75A


2. POWER SOURCE : AC 3φ 440V 50Hz

3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO.	DESCRIPTION	MTL	SUB QTY	TOTAL QTY	REMARKS.
PROJECT					
TITLE					
HOISTING & T/S BOX (저속)					
EQUIPMENT					
DRAWN	DESIGNED	CHECKED	APPROVED	DATE	DM
					mm
				SCALE	PROJECTION
				A3/3	3rd
				REF. DRAWING	
				SHEET No.	DWG No.
				KUK DONG HOIST CO., LTD.	KD02BA42

192.168.11.155 / 2011-07-12 14:37:27

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT																			ADR'S NO.
TRAVERSING MOTION																			C2

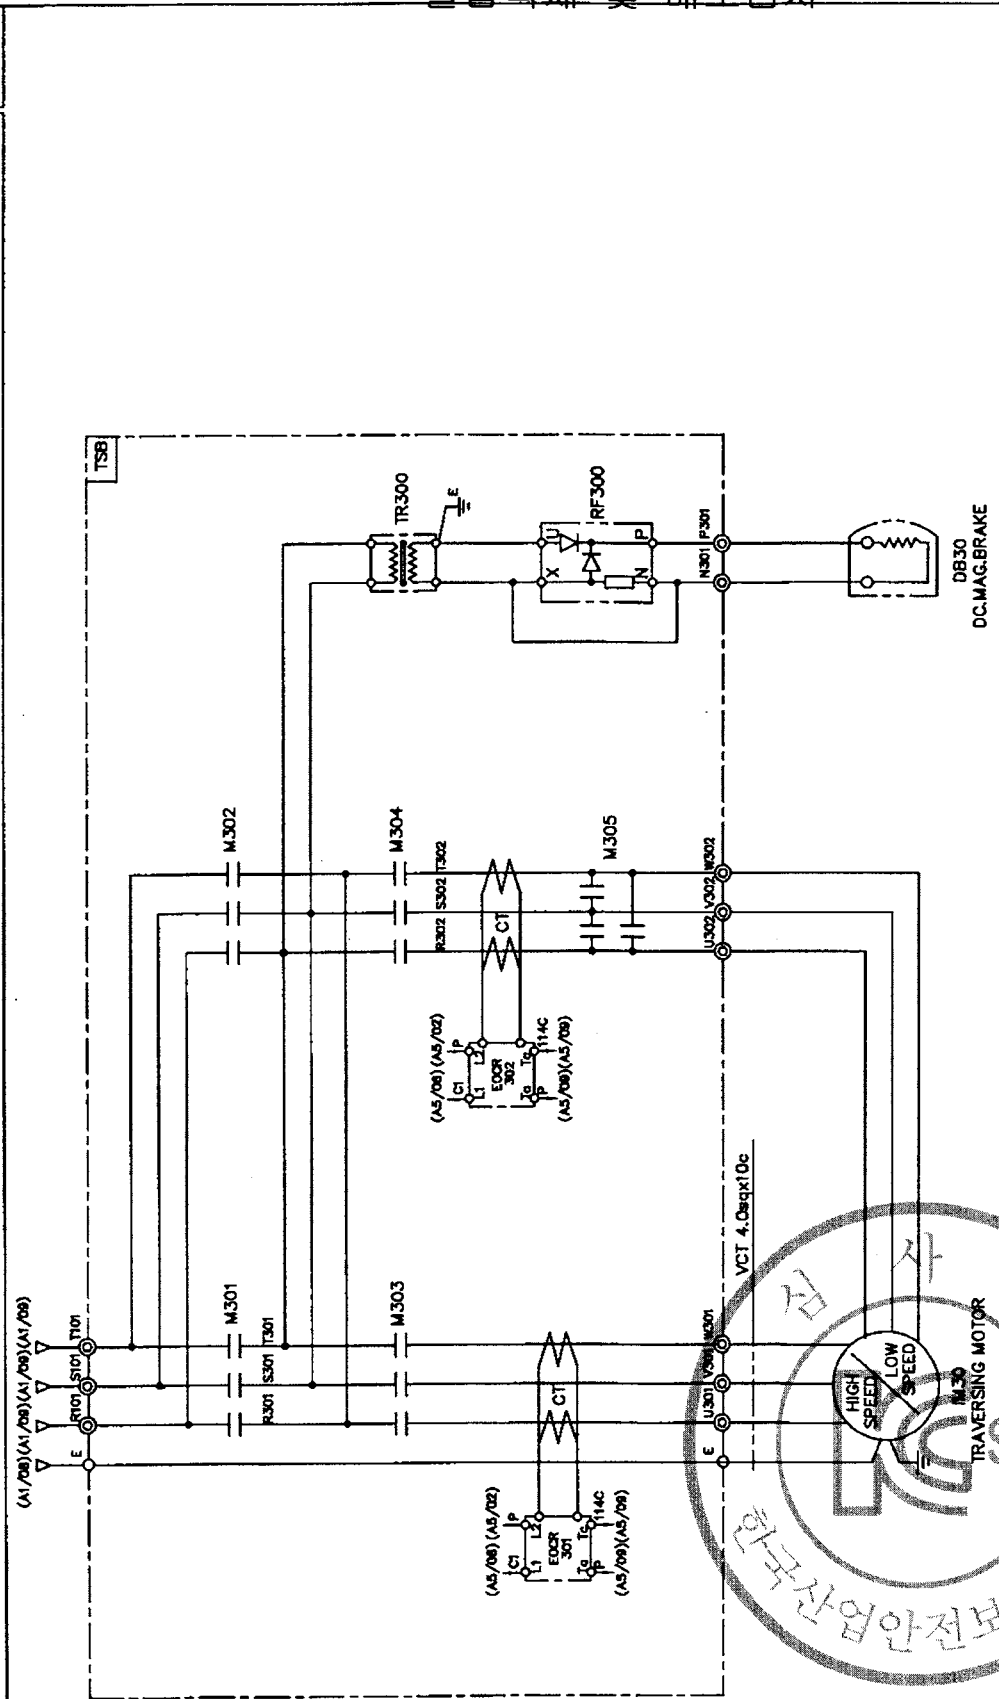

SPECIFICATION SYMBOLS		TRAVERSING MOTOR		MAGNET CONTACTOR		SILICON RECTIFIER		ELECTRIC OVER CURRENT RELAY		TRANSFORMER	
DESCRIPTION		IM 30		M301, M302, M303, M304, M305		RF 300		EOCR 301, 302		TR300	
440V		0.5/0.25KWx6/2P AC3PH 440V 60Hz		DOC-22P		SR-30		SS-05		AC440/220V, 300VA	
440V		0.5/0.25KWx4/8P AC3PH 440V 60Hz		DOC-22P		SR-30		SS-05		AC440/220V, 300VA	
SELECTION MAKER		KUKDONG		DAERYUK		ASECO		SHINHAN			
CUSTOMER				DRAWING		DESIGN		CHECKED		APPROVED	
DRAWING TITLE		TRAVERSING POWER CONTROL CIRCUIT		SCALE		NONE		DATE			
REVISIONS		CHK. APP.		DWG. NO.		KUKDONG HOIST CO., LTD.		KDW. NO.		KD02E45	
DATE											

192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/15AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	460V/110.120V/60VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	31x20x50	1	
11	F11,12,(13)	FUSE	1A, (3A)	2(1)	PUR'

NOTE 1. 전선의 색상은 다음과 같다.


- 1) 흑색 : 교류 및 직류 전원선으로
- 2) 적색 : 교류 제어회로
- 3) 주황색 : 외부 전원에서 공급되는 연동장치 제어회로
- 4) 녹색 또는 녹색과 황색 혼합 : 접지선

2. CABLE MATERIAL : KIV OR EQUIVALENT

MIN SIZE : 2.5sq

3. 제어용 전선 : 2.5mm KIV,HIV
4. 제라시 다소 변경 될수있음.
5. 외함 개방구멍은 다음과 같음.

- 1) 외함 개방시 용접부분이 차단되도록 함.
- 2) 외함 개방후 용접되어있는 부분은 IP2X 이상의 직접 접촉 방호가 되어있을것.

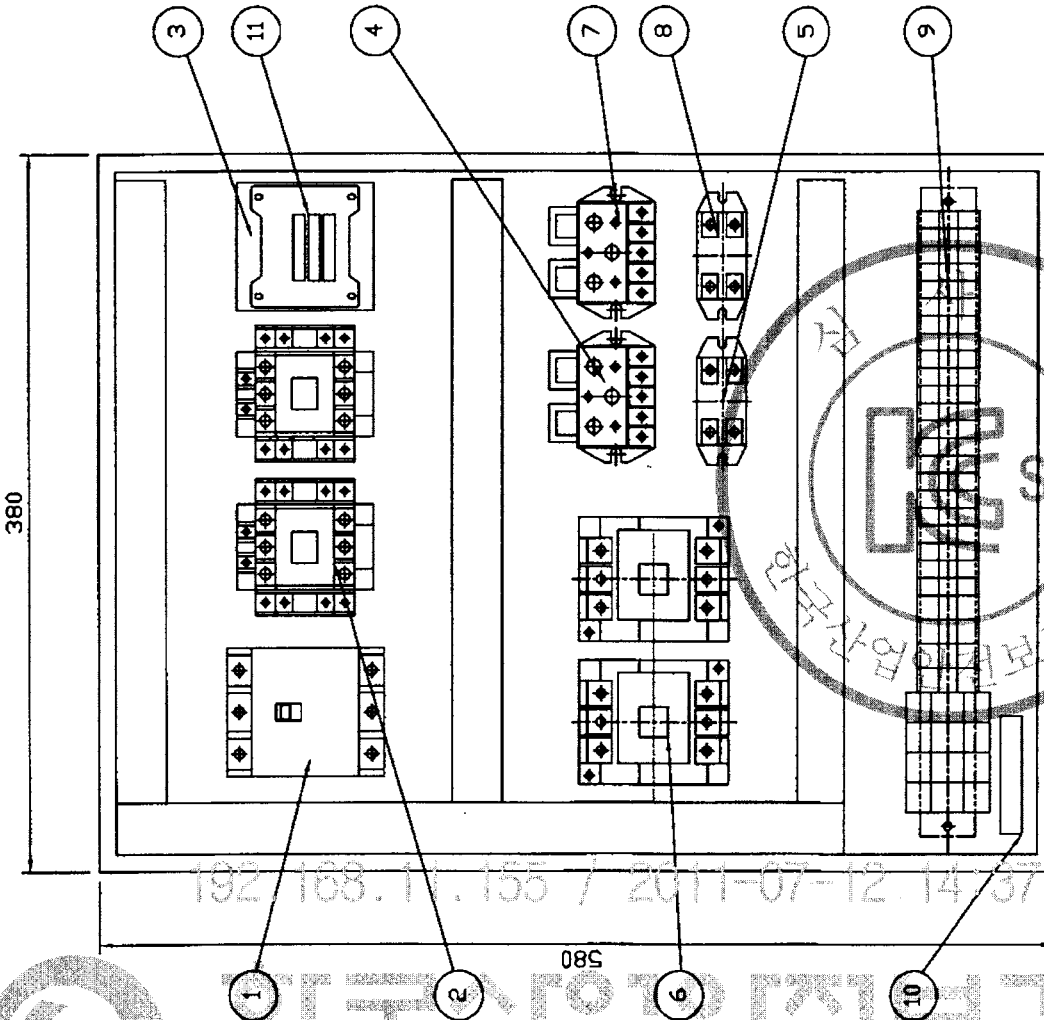

NOTE

1. UPPER LIMIT LS-1,LS-2의 정전 허용 전류 : AC 600V 75A
2. POWER SOURCE : AC 3φ 460V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO.	DESCRIPTION	MTL	SUB	TOTAL	QTY	SUB	TOTAL	WEIGHT(Kg)	REMARKS.	
									DATE	DIM
PROJECT									DATE	mm
TITLE									SCALE	PROJECTION
DRAWN									DESIGNED	3rd
CHECKED									APPROVED	REF. DRAWING
SHEET No.									DWC No.	
KUD KUK DONG HOIST CO., LTD.									KD02BA51	




NOTE 1. 전선의 예상은 다음과 같다.

- NOTE**

1. UPPER LIMIT LS-1,LS-2의 접점 허용 전류 : 30A AC 600V 75A
2. POWER SOURCE : AC 3 ϕ 460V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

192.168.11.155 / 2011-07-12 14:37:27

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT																			ADR'S NO.
TRAVERSING MOTION																			C2

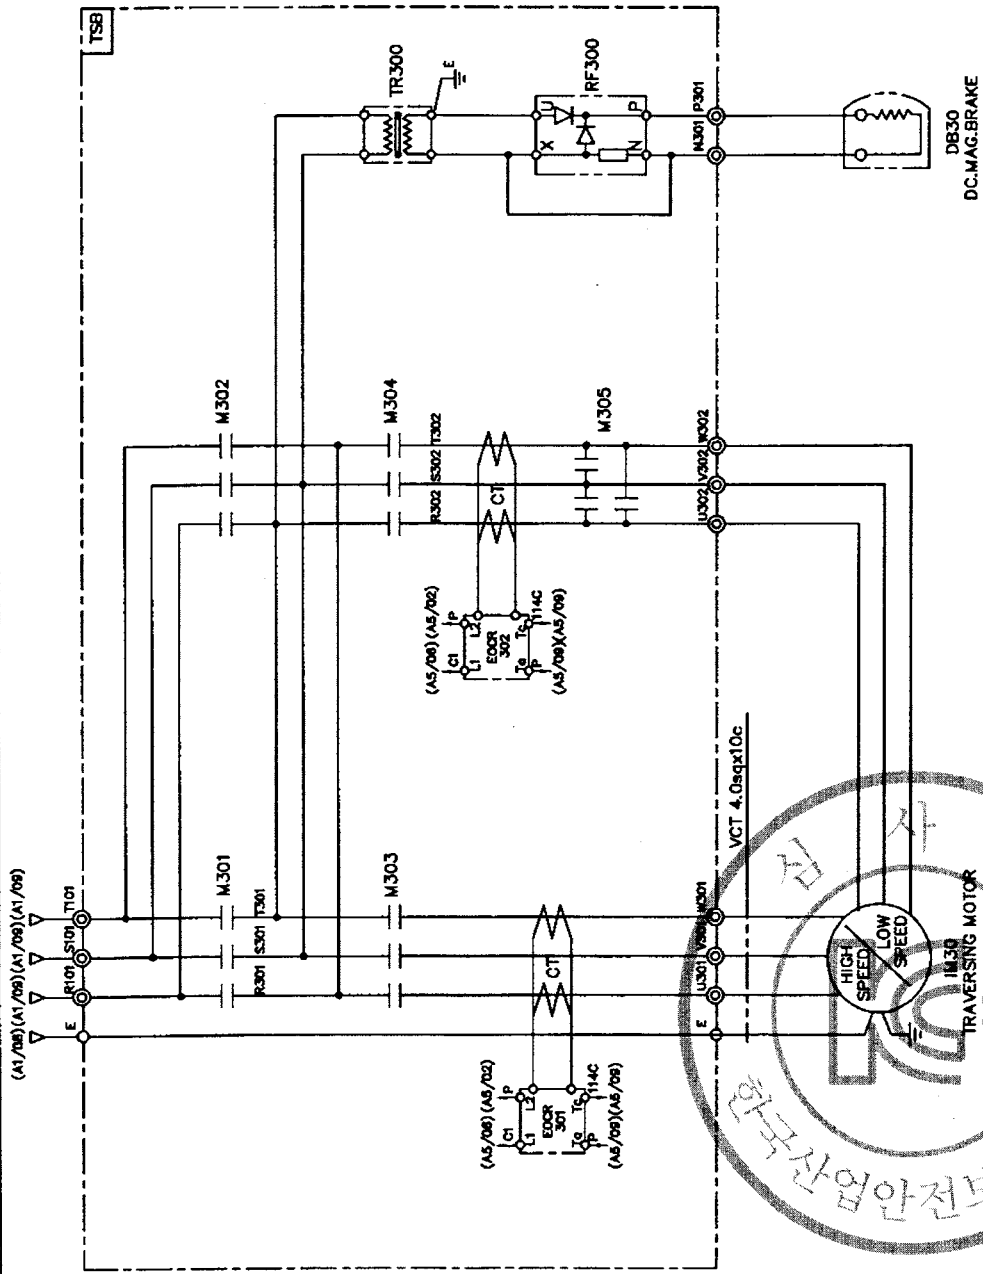


SPECIFICATION		SYMBOLS		DESCRIPTION		MAGNET CONTACTOR		SILICON RECTIFIER		ELECTRIC OVER CURRENT RELAY		TRANSFORMER	
TRAVERSING MOTOR		IM 30		460V 0.5/0.25KWx6.72P AC3PH 460V 60Hz		M301, M302, M303, M304, M305		RF 300		EOCR 301, 302		TR300	
DC MAG. BRAKE		DB30		DC 100V		DOC-22P		SR-30		SS-05		AC460/220V, 300VA	
TRAVERSING MOTOR		IM 30		460V 0.8/0.4KWx4/8P AC3PH 460V 60Hz		DOC-22P		SR-30		SS-05		AC460/220V, 300VA	
SELECTION MAKER		KUKDONG				DAERYUK		ASECO				SHINHAN	
DRAWING		DESIGN		CHECKED		APPROVED		SCALE		DATE		ORDER NO.	
DRAWING TITLE		TRAVERSING POWER CONTROL CIRCUIT						NONE					
REVISIONS		CHK. APP.											
DATE													
DWG. NO.		KUKDONG HOIST CO., LTD.										K020E55	

192.168.11.155 / 2011-07-12 14:37:27

한국산업안전보건공단

192.168.11.155 / 2011-07-12 14:37:27

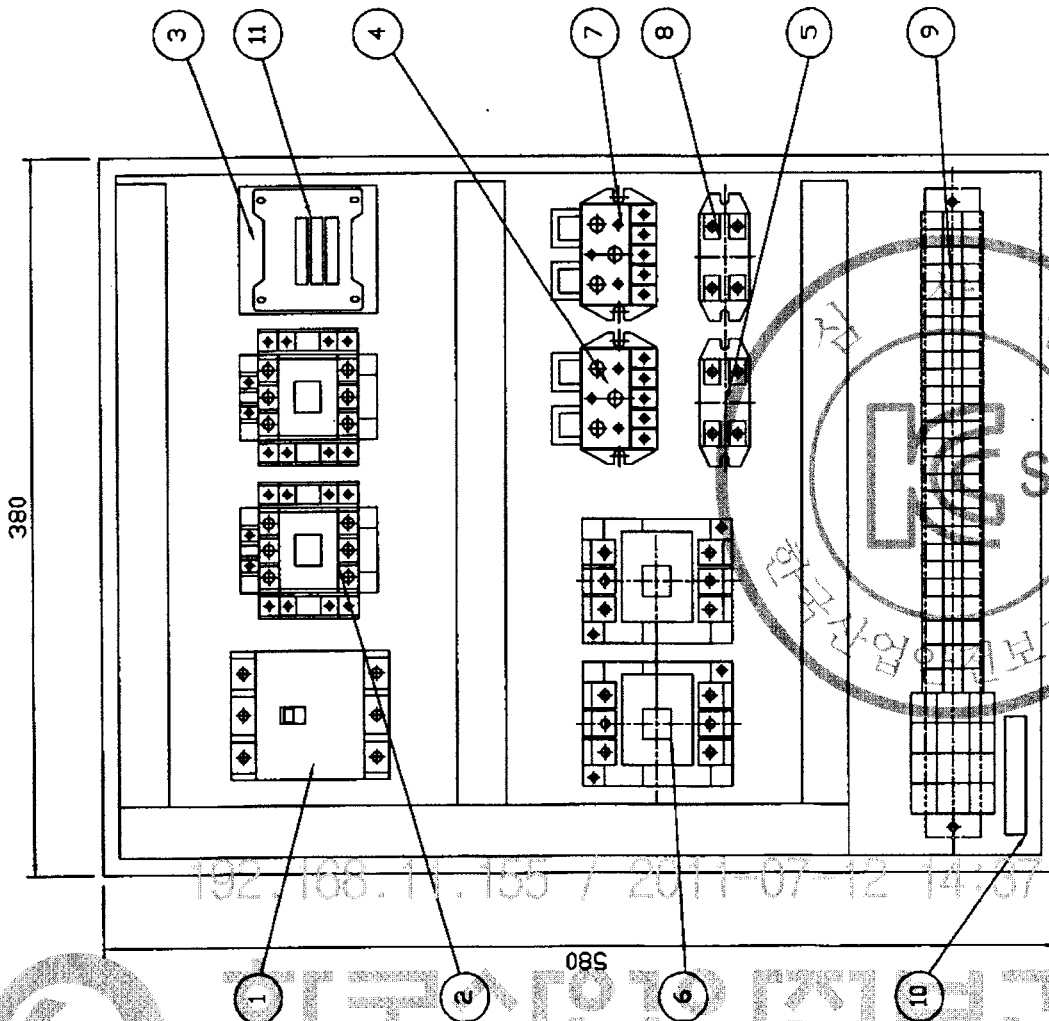

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/15AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	480V/110,120V/60VA	1	SHINWHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-30	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	3t20x50	1	
11	F11,12,(13)	FUSE	1A , (3A)	2(1)	PUR'

NOTE 1. 전선의 예상은 다음과 같다.

- 1) 흑색 : 고무 및 리무 전선선로
 - 2) 적색 : 교류제어회로
 - 3) 주황색 : 외부 전선에서 공급되는 전동장치 제어회로
 - 4) 녹색 또는 녹색과 황색 혼합 : 접지선
2. CABLE MATERIAL : KIV OR EQUIVALENT
- MIN SIZE : 2.5sq
3. 제어용 전선 : 2.5mm KIV/HIV
4. 제어각 다공 절연 필수임.
 5. 외함 개방부구조는 다음과 같음.
- 1) 외함 개방시 용접부위는 차단되도록 함.
 - 2) 외함 개방부 용접되어있는 부분에는 IP2X 이상의 차단

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

NOTE

1. UPPER LIMIT LS-1LS-2의 정점 허용 전압. 용량 : AC 600V 75A
2. POWER SOURCE : AC 3 ϕ 480V 60Hz
3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO	SYMBOL	DESCRIPTION	SPECIFICATION	Q'TY	MAKER
1	MCCB100	NO FUSE BREAKER	33AF/20AT	1	DEARYUK
2	M101,102	MAG. CONTACTOR	DOC-22P	2	DEARYUK
3	TR1	TRANSFORMER	480V/110,120V/60VA	1	SHINHAN
4	EOCR100	ELECTRONIC OVER CURRENT RELAY	SS-30	1	ASECO
5	RF100	SILICON RECTIFIER	SR-60	1	ASECO
6	M301,302	MAG. CONTACTOR	DOC-22P	2	DEARYUK
7	EOCR300	ELECTRONIC OVER CURRENT RELAY	SS-05	1	ASECO
8	RF300	SILICON RECTIFIER	SR-30	1	ASECO
9		TERMINAL BLOCK	35A,15A	1	BUMHAN
10		EARTH TERMINAL	3tx20x50	1	
11	F11,12,(13)	FUSE	1A, (2A)	2(1)	PUR'

NOTE

1. 전선의 색상은 다음과 같다.

1) 흑색 : 교류 및 직류 전원선으로

2) 적색 : 교류 제어회로

3) 파랑색 : 외부 전원에서 공급되는 연동장치 제어회로

4) 녹색 또는 노색과 황색 혼용 : 접지선

2. CABLE MATERIAL : KIV OR EQUIVALENT

MIN SIZE : 2.5sq


3. 제어용 전선 : 2.5mm KIV/HIV

4. 제하시 다소 변경 될수있음.

5. 외함 개방구조는 다음과 같을것.

1) 외함 개방시 중전부분이 차단되도록 할것.

2) 외함 개방후 충전되어있는 부분은 IP2X 이상의 직접 접촉 방호가 되어있을것.

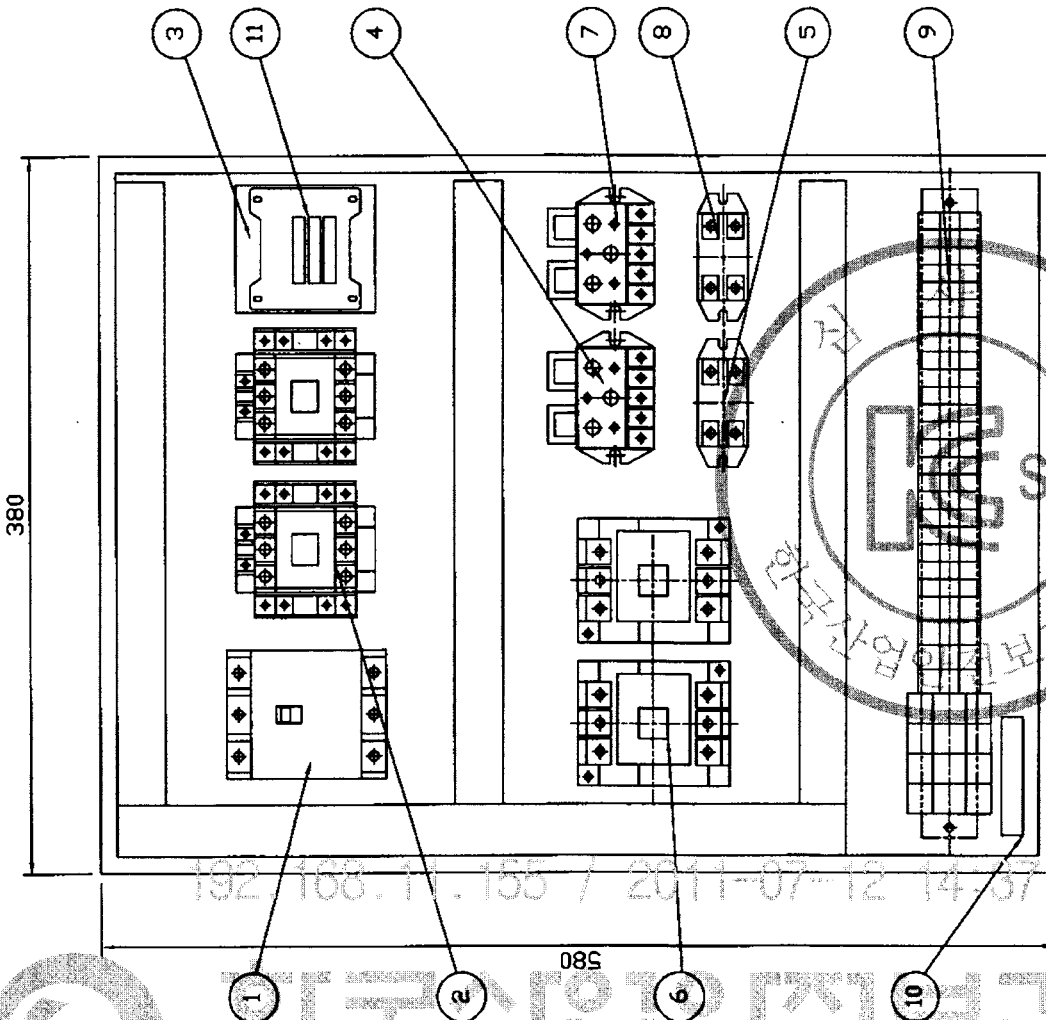


NOTE

1. UPPER LIMIT LS-1,LS-2의 한계 허용 전류, 용량 : AC 600V 75A

2. POWER SOURCE : AC 3φ 480V 60Hz


3. EARTH TERMINAL RESISTANCE 0.018 Ω

NO.	DESCRIPTION	MTL	SUB		TOTAL	REMARKS.
			QTY	WGT(KG)		
PROJECT						
DATE						
DIM mm						
TITLE						
HOISTING & T/S BOX (제어)						
EQUIPMENT						
SCALE						
PROJECTION						
A3/3						
3rd						
REF. DRAWING						
DRAWN						
DESIGNED						
CHECKED						
APPROVED						
SHEET No.						
DWC No.						
KUD						
극동호이스트 주식회사						
KUK DONG HOIST CO., LTD.						
KDO2BA62						

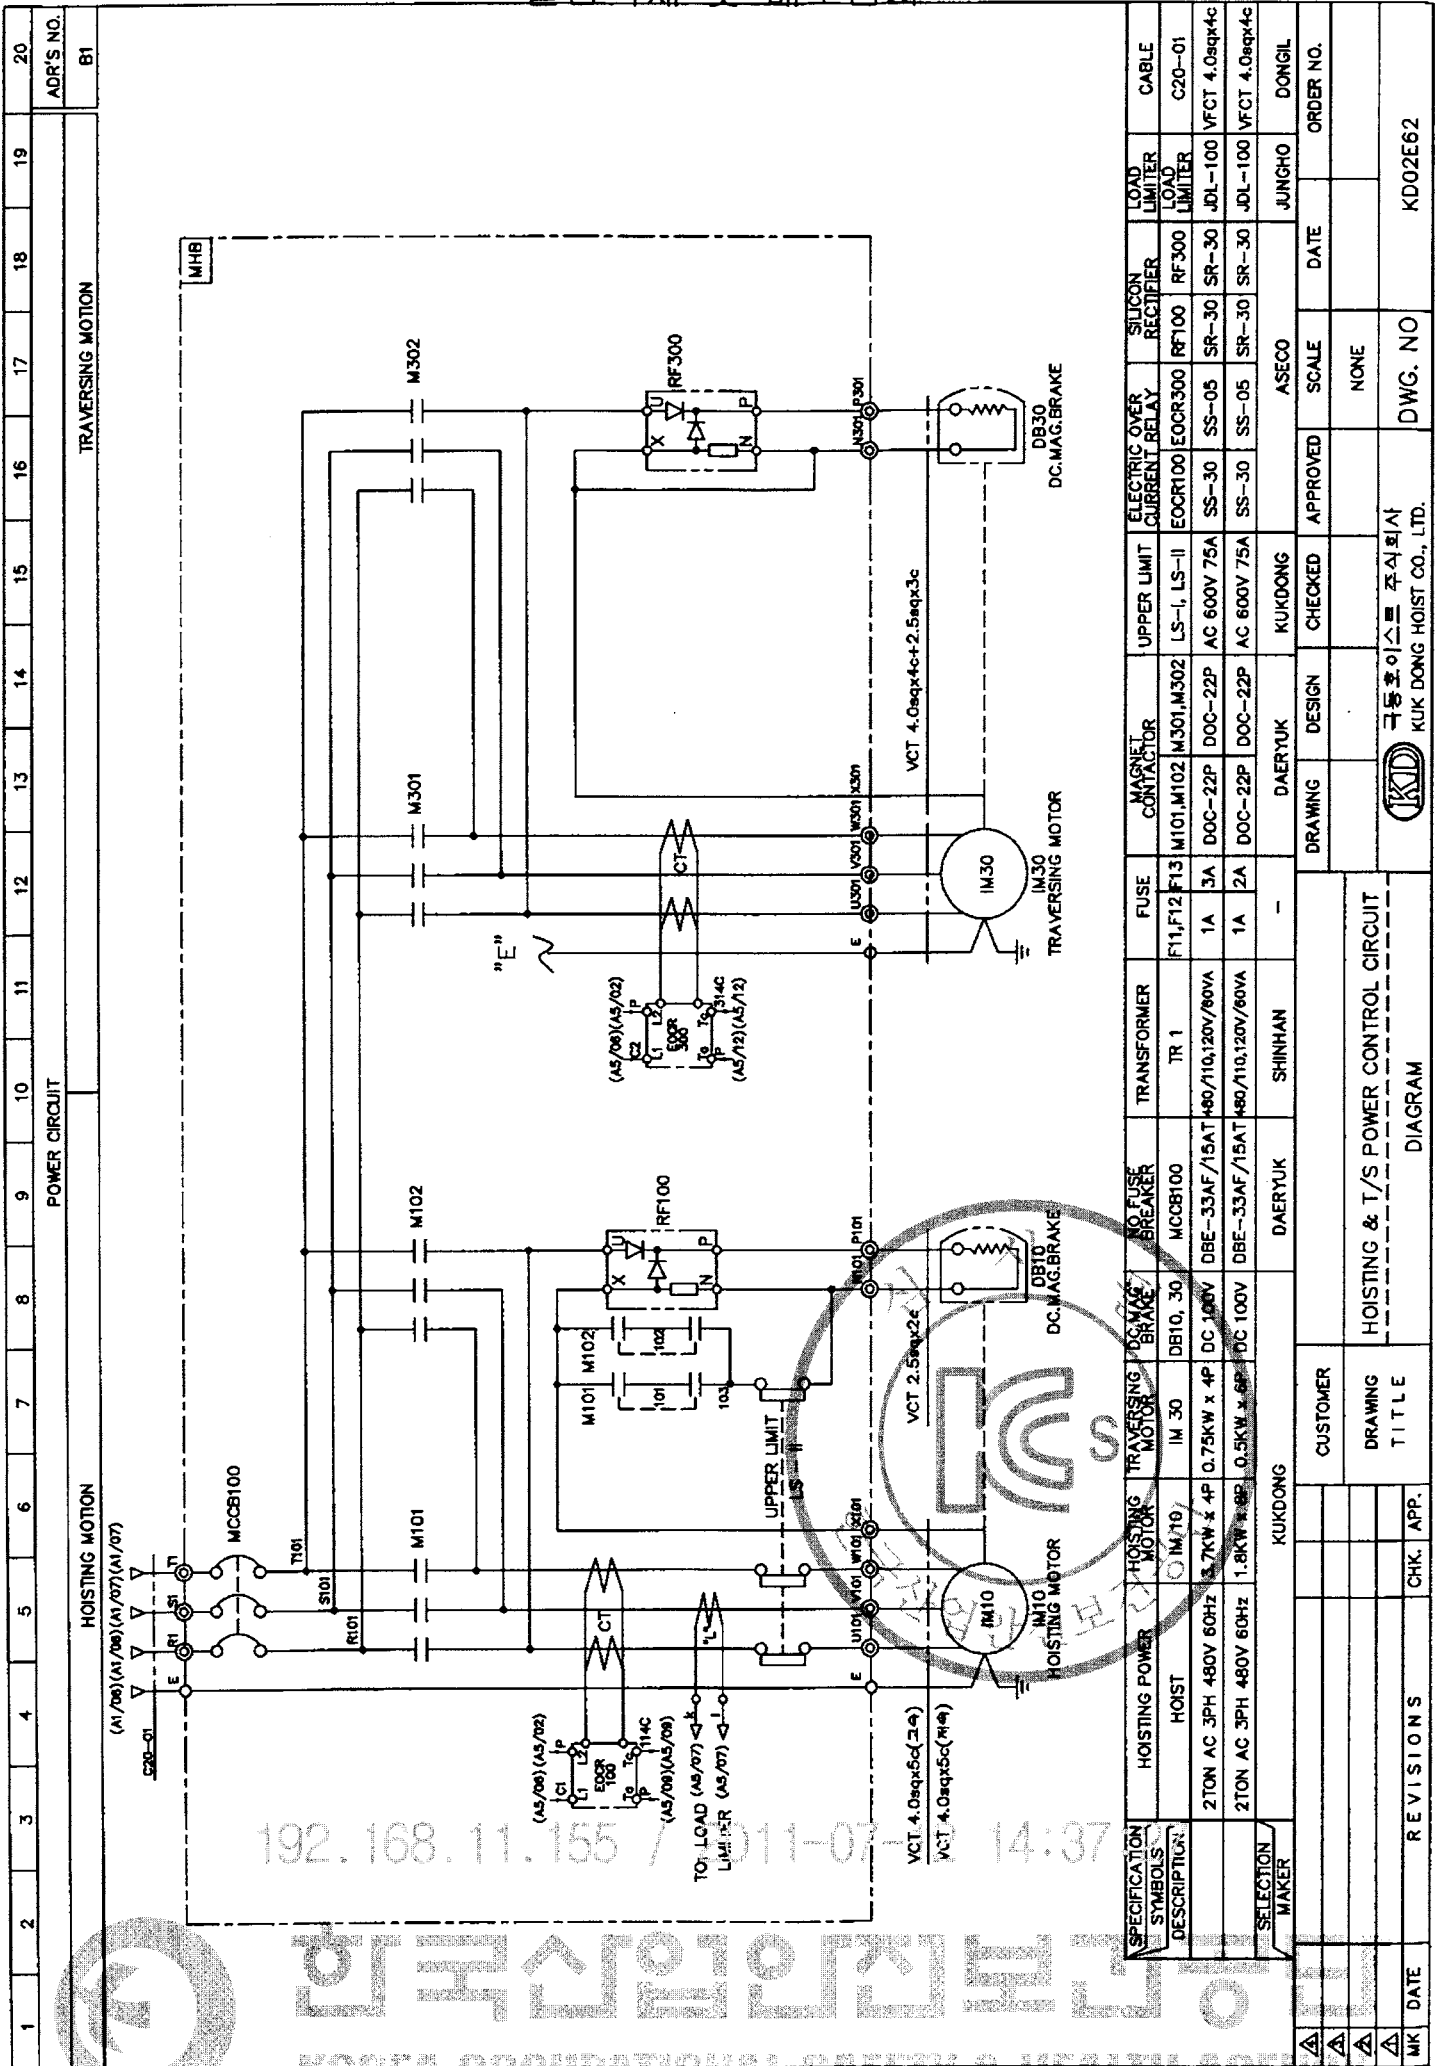

SPECIFICATION SYMBOLS		DESCRIPTION		CABLE	
HOISTING POWER	HOISTING MOTOR	HOISTING POWER	HOISTING MOTOR	HOISTING POWER	HOISTING MOTOR
HOIST	IM10	HOIST	IM10	HOIST	IM10
2TON AC 3PH 480V 60Hz	0.75KW x 4P	2TON AC 3PH 480V 60Hz	0.75KW x 4P	2TON AC 3PH 480V 60Hz	0.75KW x 4P
2TON AC 3PH 480V 60Hz	1.8KW x 4P	2TON AC 3PH 480V 60Hz	1.8KW x 4P	2TON AC 3PH 480V 60Hz	1.8KW x 4P
SELECTION MAKER		KUKDONG		KUKDONG	
CUSTOMER		KUKDONG		KUKDONG	
DRAWING TITLE		HOISTING & T/S POWER CONTROL CIRCUIT		HOISTING & T/S POWER CONTROL CIRCUIT	
REVISIONS		CHK. APP.		CHK. APP.	
DATE		2011-07-12		2011-07-12	
DWG. NO.		K020E62		K020E62	
ORDER NO.		NONE		NONE	
JUNCHO		JUNCHO		JUNCHO	
DONGIL		DONGIL		DONGIL	

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
POWER CIRCUIT																			ADR'S NO.
TRAVERSING MOTION																			C2

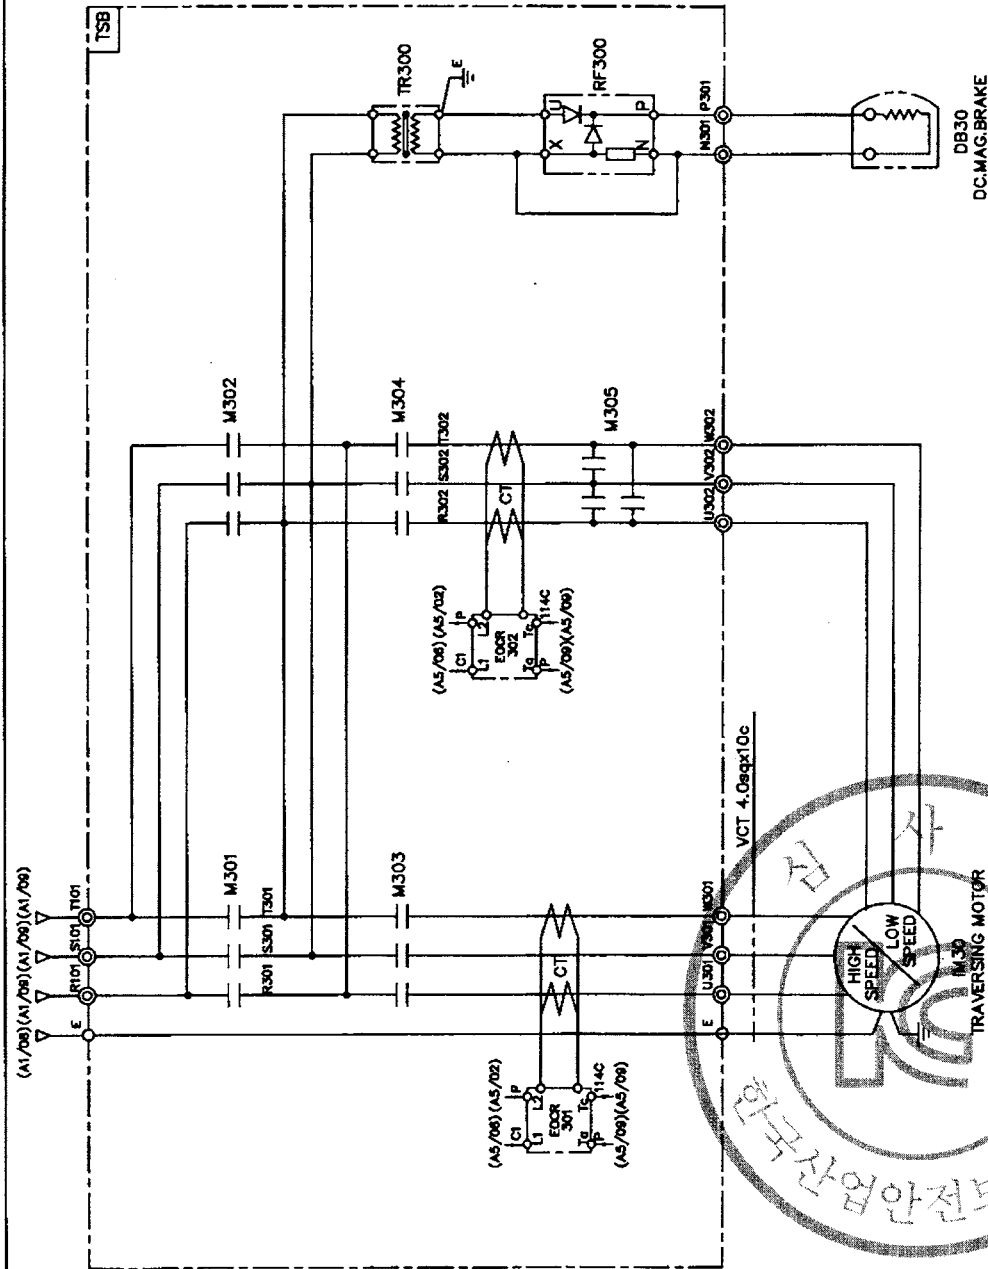


																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						</	
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----	--

192.168.11.155 / 2011-07-12 14:37:27


한국산업안전공단

192.168.11.155 / 2011-07-12 14:37:27

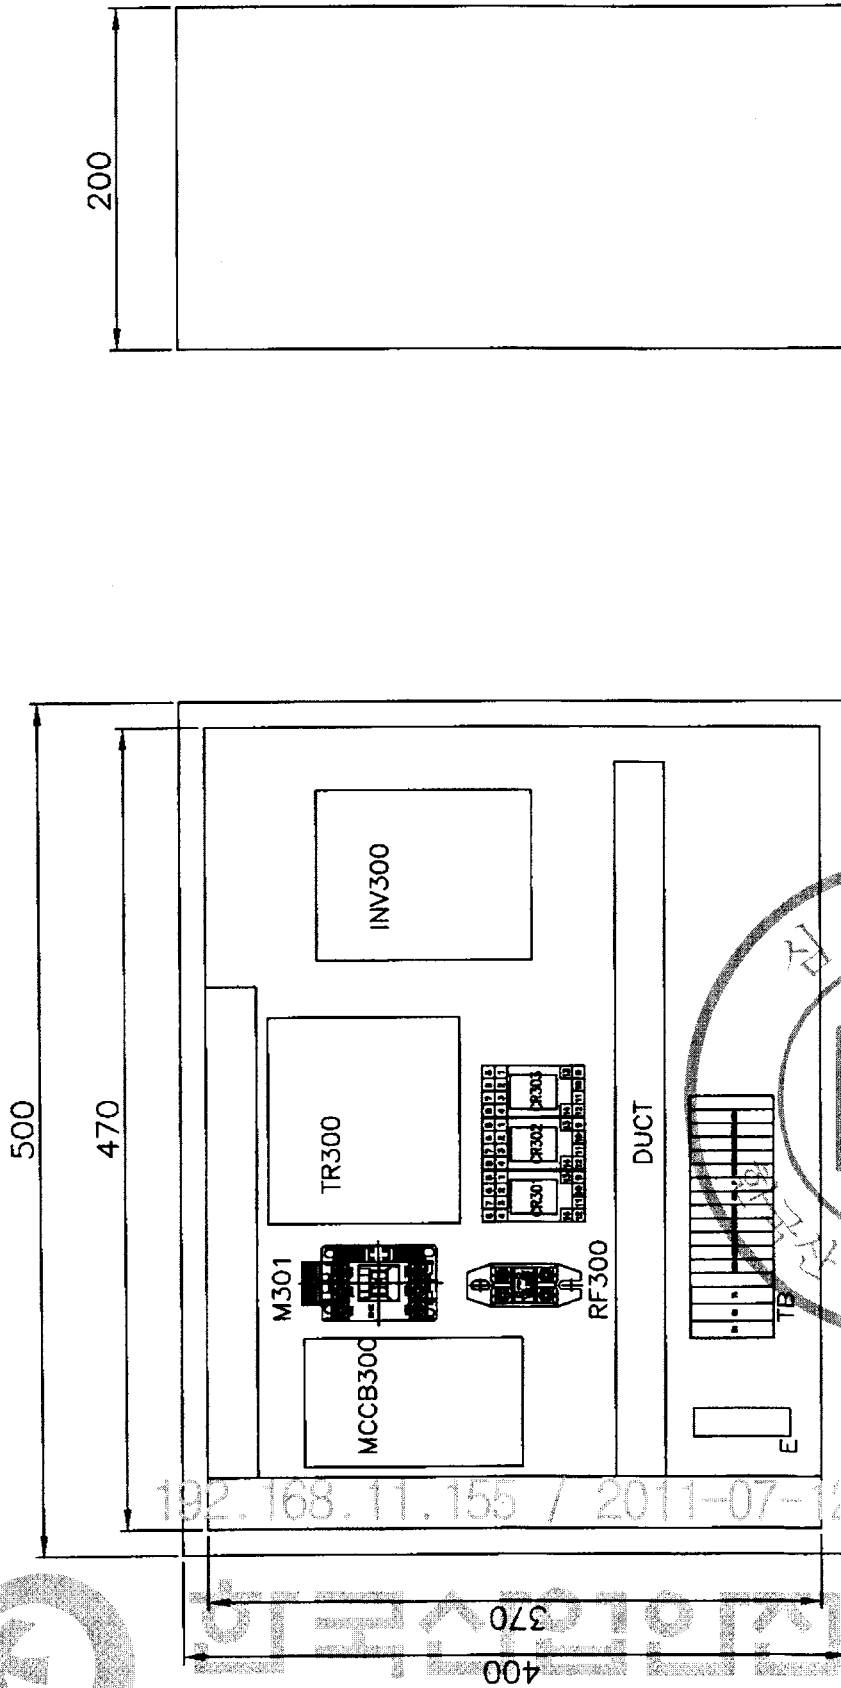
[illegible]

[illegible]

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20.			
EM. STOP										CONTROL CIRCUIT										ADR'S NO.		
LOAD LIMITER										UP		DOWN		EAST		WEST		SOUTH		NORTH		A5

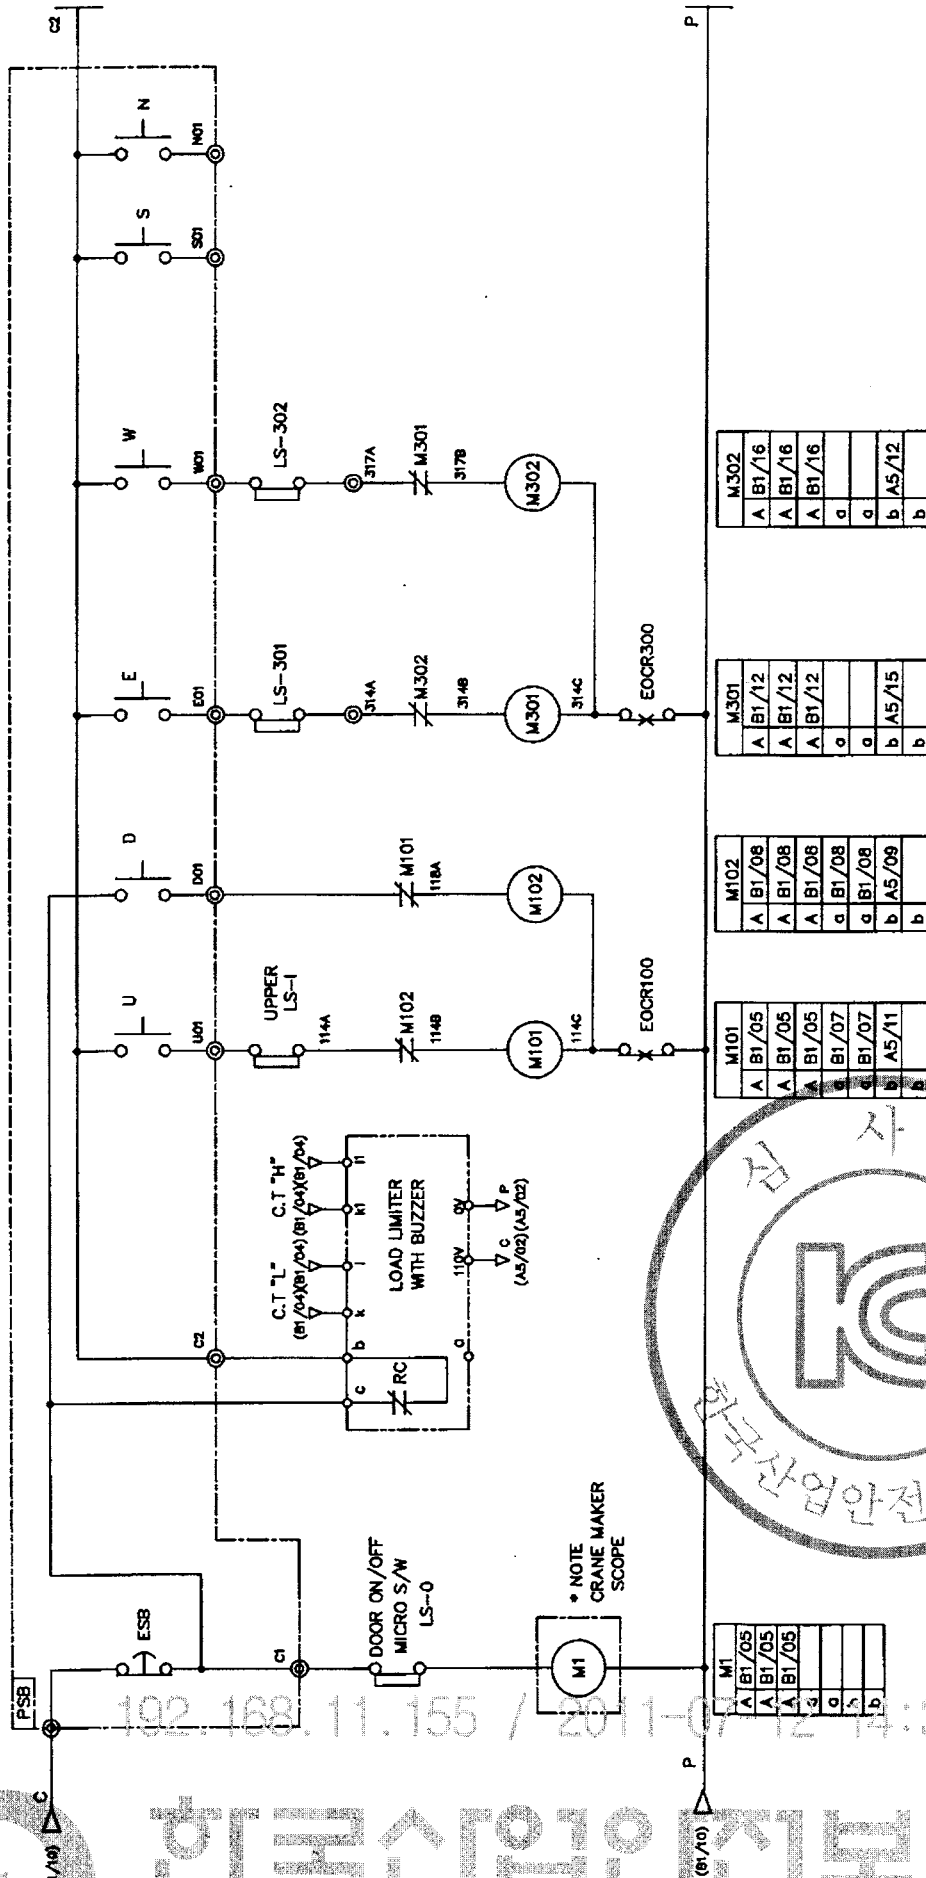

27 2024. 10. 27 2024. 10. 27										2024. 10. 27 2024. 10. 27 2024. 10. 27																																																											
SPECIFICATION SYMBOLS										DOOR ON/OFF										UPPER LIMIT										PENDANT P.B. S/W										LOAD LIMITER										LIMIT SWITCH																			
DESCRIPTION										LS-0										LS-1										E.S.B										LOAD LIMITER										LS-301,302																			
										HY-R704B										AC 600V 3A										250V 3A										JDL-100										HY - W904																			
										HY-R704B										AC 600V 3A										250V 3A										JDL-100										HY - W904																			
MAKER										HAN YOUNG										KUNHUNG										KUNHUNG										JUNG-HO										HANYOUNG																			
DRAWING										DESIGN										CHECKED										APPROVED										SCALE										DATE										ORDER NO.									
																																								NONE																													
 극동호이스트 주식회사 KUK DONG HOIST CO., LTD.										MAIN POWER 2 & CONTROL CIRCUIT										DIAGRAM										DWG. NO										KD02E002																													
CUSTOMER																																																																					
DRAWING TITLE																																																																					
REVISIONS										CHK.										APP.																																																	
DATE																																																																					

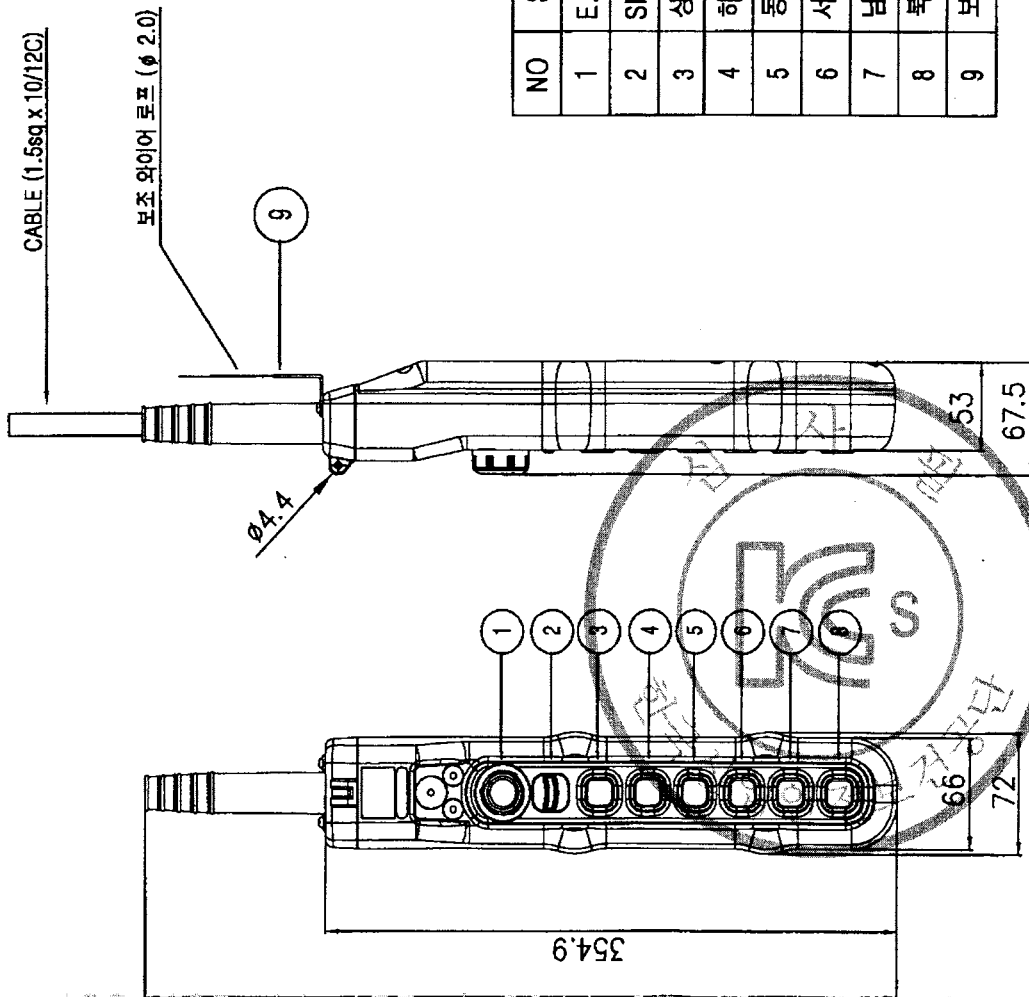

색상	구분	조작버튼	표시등
적색		비상	비상
황색		비정상	비정상
녹색		정상	정상
청색		의무	의무
흰색, 회색 - 흑색		지정원의미없음	기타


* MATERIAL : POLYCARBONATE(PLASTIC)
 * BODY COLOR : YELLOW, BLACK
 * IP : 55 이상

NO	SYMBOL	TYPE	SPEC.	COLOR
1	E.B.S	PUSH LOCK TURN RESET TYPE	250VAC x 6A	RED
2	SPARE			
3	상	1PUSH BUTTON 1STEP		BLACK
4	하	1PUSH BUTTON 1STEP		
5	동 (좌)	1PUSH BUTTON 1STEP		
6	서 (우)	1PUSH BUTTON 1STEP		
7	남 (전)	1PUSH BUTTON 1STEP		
8	북 (후)	1PUSH BUTTON 1STEP		
9	보조 WIRE	φ 2.0		

CUSTOMER	DRAWING TITLE	CHK.	APP.	REVISIONS	DATE	DRAWING	DESIGN	CHECKED	APPROVED	SCALE	DATE
						PENDANT PUSH BUTTON SWITCH LAY OUT					
						KSD KUK DONG HOIST CO., LTD. DWG. NO.					

192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

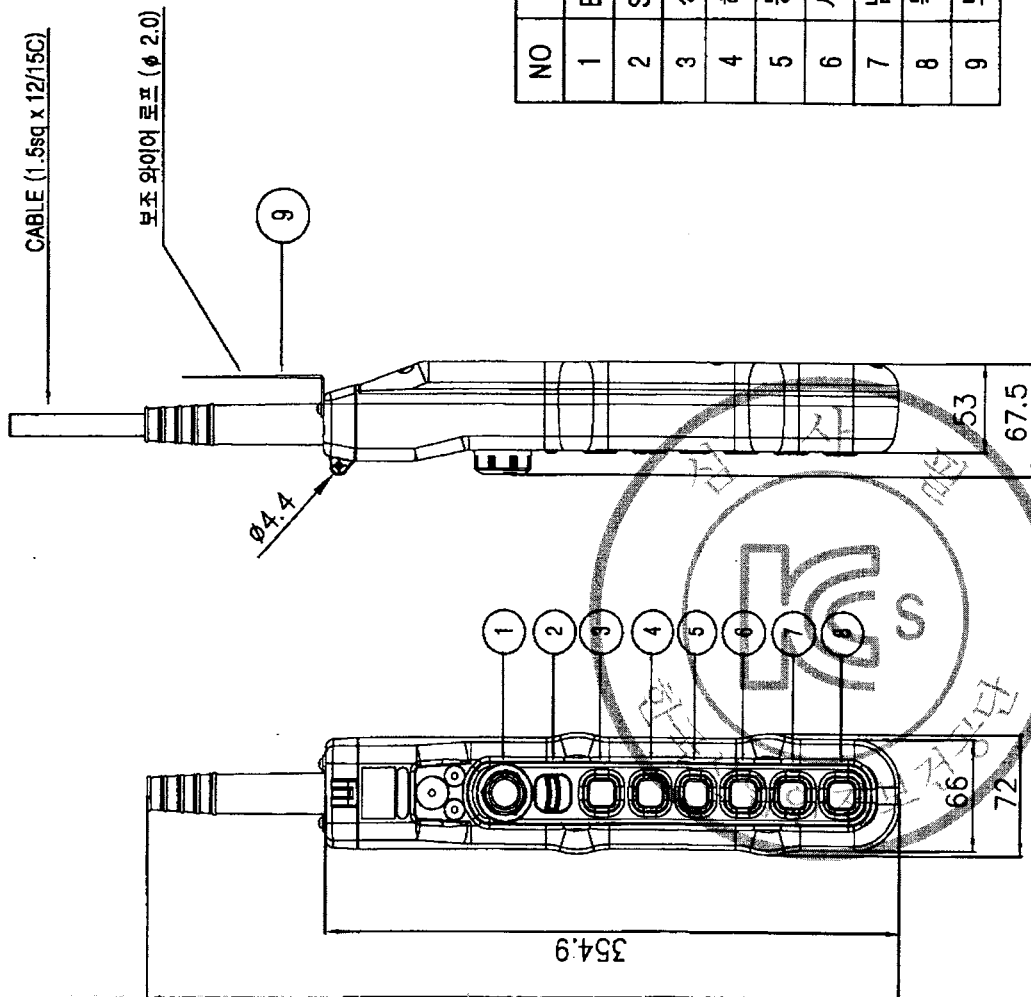

색상	구분	조작버튼	표시등
적색		비상	비상
황색		비정상	비정상
녹색		정상	정상
청색		의무	의무
흰색, 회색 -- 흑색 지정된의미없음			기타

* MATERIAL : POLYCARBONATE (PLASTIC)

* BODY COLOR : YELLOW, BLACK

* IP : 55 이상

NO	SYMBOL	TYPE	SPEC.	COLOR
1	E.B.S	PUSH LOCK TURN RESET TYPE	250VAC x 6A	RED
2	SPARE			
3	상	1PUSH BUTTON 1STEP		BLACK
4	하	1PUSH BUTTON 1STEP		
5	동 (좌)	1PUSH BUTTON 2STEP		
6	서 (우)	1PUSH BUTTON 2STEP		
7	남 (전)	1PUSH BUTTON 1STEP		
8	북 (후)	1PUSH BUTTON 1STEP		
9	보조 WIRE	φ 2.0		

△																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

LOAD LIMITER 권고 SETTING치

* POWER SOURCE : AC 3Φ 220V 60Hz

극동하이스트(주)

HOIST	MOTOR 용량	LOAD LIMITER 권고 SETTING치			LOAD CURRENT		C.T MODEL	연결단자 NO	C.T 용량	REMARK
		LOAD CURRENT	ADJ START TIME	SHOCK TIME	100%	110%				
0.5 TON	1.2KW x 8P	110%	1 SEC	1 SEC	8.0 A	9.0 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	7.6 A	8.4 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	10 A	11.2 A	CT-1	K, L	5 V.A	
1 TON	1.2KW x 8P	110%	1 SEC	1 SEC	8.0 A	9.0 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	7.6 A	8.4 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	10 A	11.2 A	CT-1	K, L	5 V.A	
2 TON	1.8KW x 8P	110%	1 SEC	1 SEC	11.0 A	12.2 A	CT-1	K, L	5 V.A	
	2.5KW x 6P	110%	1 SEC	1 SEC	12.0 A	13.2 A	CT-1	K, L	5 V.A	
	3.7KW x 4P	110%	1 SEC	1 SEC	16.0 A	17.6 A	CT-1	K, L	5 V.A	
2.8 TON	2.5KW x 8P	110%	1 SEC	1 SEC	17.7 A	19.5 A	CT-1	K, L	5 V.A	
	5.0KW x 4P	110%	1 SEC	1 SEC	22.8 A	25.0 A	CT-1	K, L	5 V.A	
	2.8KW x 8P	110%	1 SEC	1 SEC	17.7 A	19.5 A	CT-1	K, L	5 V.A	
3 TON	5.5KW x 4P	110%	1 SEC	1 SEC	22.8 A	25.0 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	23.0 A	25.3 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	28.2 A	31.0 A	CT-1	K, L	5 V.A	
5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	34.4 A	38.4 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	23.0 A	25.3 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	28.2 A	31.0 A	CT-1	K, L	5 V.A	
7.5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	34.4 A	38.4 A	CT-1	K, L	5 V.A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

LOAD LIMITER 권고 SETTING치

* POWER SOURCE : AC 3Φ 380V 60Hz

극동하이스트(주)

HOIST	MOTOR 용량	LOAD LIMITER 권고 SETTING치			LOAD CURRENT		C.T MODEL	연결단자 NO	C.T 용량	REMARK
		LOAD CURRENT	ADJ START TIME	SHOCK TIME	100%	110%				
0.5 TON	1.2KW x 8P	110%	1 SEC	1 SEC	4.6 A	5.2 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	5.4 A	4.9 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	5.6 A	6.4 A	CT-1	K, L	5 V.A	
1 TON	1.2KW x 8P	110%	1 SEC	1 SEC	4.6 A	5.2 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	5.4 A	4.9 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	5.6 A	6.4 A	CT-1	K, L	5 V.A	
2 TON	1.8KW x 8P	110%	1 SEC	1 SEC	6.4 A	7.1 A	CT-1	K, L	5 V.A	
	2.5KW x 6P	110%	1 SEC	1 SEC	7.0 A	7.7 A	CT-1	K, L	5 V.A	
	3.7KW x 4P	110%	1 SEC	1 SEC	9.3 A	10.3 A	CT-1	K, L	5 V.A	
2.8 TON	2.5KW x 8P	110%	1 SEC	1 SEC	10.3 A	11.4 A	CT-1	K, L	5 V.A	
	5.0KW x 4P	110%	1 SEC	1 SEC	12.2 A	13.5 A	CT-1	K, L	5 V.A	
	2.8KW x 8P	110%	1 SEC	1 SEC	10.3 A	11.4 A	CT-1	K, L	5 V.A	
3 TON	5.5KW x 4P	110%	1 SEC	1 SEC	12.2 A	13.5 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	13.3 A	14.6 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	16.3 A	18.0 A	CT-1	K, L	5 V.A	
5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	19.9 A	23.1 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	13.3 A	14.6 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	19.9 A	23.1 A	CT-1	K, L	5 V.A	
7.5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	16.3 A	18.0 A	CT-1	K, L	5 V.A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

LOAD LIMITER 권고 SETTING치

* POWER SOURCE : AC 3Φ 440V 60Hz

극동호이스트㈜

HOIST	MOTOR 용량	LOAD LIMITER 권고 SETTING치			LOAD CURRENT		C.T MODEL	연결단자 NO	C.T 용량	REMARK
		LOAD CURRENT	ADJ START TIME	SHOCK TIME	100%	110%				
0.5 TON	1.2KW x 8P	110%	1 SEC	1 SEC	4.0 A	4.6 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.8 A	4.5 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	5.0 A	5.9 A	CT-1	K, L	5 V.A	
1 TON	1.2KW x 8P	110%	1 SEC	1 SEC	4.0 A	4.6 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.8 A	4.5 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	5.0 A	5.9 A	CT-1	K, L	5 V.A	
2 TON	1.8KW x 8P	110%	1 SEC	1 SEC	5.5 A	6.1 A	CT-1	K, L	5 V.A	
	2.5KW x 6P	110%	1 SEC	1 SEC	5.8 A	6.4 A	CT-1	K, L	5 V.A	
	3.7KW x 4P	110%	1 SEC	1 SEC	8.0 A	10.8 A	CT-1	K, L	5 V.A	
2.8 TON	2.5KW x 8P	110%	1 SEC	1 SEC	8.9 A	9.8 A	CT-1	K, L	5 V.A	
	5.0KW x 4P	110%	1 SEC	1 SEC	10.5 A	11.6 A	CT-1	K, L	5 V.A	
	2.8KW x 8P	110%	1 SEC	1 SEC	8.9 A	9.8 A	CT-1	K, L	5 V.A	
3 TON	5.5KW x 4P	110%	1 SEC	1 SEC	10.5 A	11.6 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	11.5 A	12.7 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	14.1 A	15.5 A	CT-1	K, L	5 V.A	
5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	16.5 A	20.5 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	11.5 A	12.7 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	14.1 A	15.5 A	CT-1	K, L	5 V.A	
7.5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	16.5 A	20.5 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	11.5 A	12.7 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	14.1 A	15.5 A	CT-1	K, L	5 V.A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

LOAD LIMITER 권고 SETTING치

* POWER SOURCE : AC 3Φ 460V 60Hz

극동하이스트(주)

HOIST	MOTOR 용량	LOAD LIMITER 권고 SETTING치			LOAD CURRENT		C.T MODEL	연결단자 NO	C.T 용량	REMARK
		LOAD CURRENT	ADJ START TIME	SHOCK TIME	100%	110%				
0.5 TON	1.2KW x 8P	110%	1 SEC	1 SEC	3.8 A	4.4 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.6 A	4.1 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	4.8 A	5.2 A	CT-1	K, L	5 V.A	
1 TON	1.2KW x 8P	110%	1 SEC	1 SEC	3.8 A	4.4 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.6 A	4.1 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	4.8 A	5.2 A	CT-1	K, L	5 V.A	
2 TON	1.8KW x 8P	110%	1 SEC	1 SEC	5.3 A	5.9 A	CT-1	K, L	5 V.A	
	2.5KW x 6P	110%	1 SEC	1 SEC	5.5 A	6.1 A	CT-1	K, L	5 V.A	
	3.7KW x 4P	110%	1 SEC	1 SEC	7.7 A	8.5 A	CT-1	K, L	5 V.A	
2.8 TON	2.5KW x 8P	110%	1 SEC	1 SEC	7.7 A	8.5 A	CT-1	K, L	5 V.A	
	5.0KW x 4P	110%	1 SEC	1 SEC	10.0 A	11.5 A	CT-1	K, L	5 V.A	
	2.8KW x 8P	110%	1 SEC	1 SEC	7.7 A	8.5 A	CT-1	K, L	5 V.A	
3 TON	5.5KW x 4P	110%	1 SEC	1 SEC	10.0 A	11.5 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	11.0 A	12.2 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	13.5 A	14.7 A	CT-1	K, L	5 V.A	
5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	16.5 A	20.5 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	11.0 A	12.2 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	13.5 A	14.7 A	CT-1	K, L	5 V.A	
7.5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	16.5 A	20.5 A	CT-1	K, L	5 V.A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

LOAD LIMITER 권고 SETTING치

극동하이스트(주)

★ POWER SOURCE : AC 3Φ 480V 60Hz

HOIST	MOTOR 용량	LOAD LIMITER 권고 SETTING치			LOAD CURRENT		C.T MODEL	연결단자 NO	C.T 용량	REMARK
		LOAD CURRENT	ADJ START TIME	SHOCK TIME	100%	110%				
0.5 TON	1.2KW x 8P	110%	1 SEC	1 SEC	3.6 A	4.2 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.5 A	3.9 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	4.6 A	5.1 A	CT-1	K, L	5 V.A	
1 TON	1.2KW x 8P	110%	1 SEC	1 SEC	3.6 A	4.2 A	CT-1	K, L	5 V.A	
	1.5KW x 6P	110%	1 SEC	1 SEC	3.5 A	3.9 A	CT-1	K, L	5 V.A	
	2.4KW x 4P	110%	1 SEC	1 SEC	4.6 A	5.1 A	CT-1	K, L	5 V.A	
2 TON	1.8KW x 8P	110%	1 SEC	1 SEC	5.1 A	5.8 A	CT-1	K, L	5 V.A	
	2.5KW x 6P	110%	1 SEC	1 SEC	5.3 A	6.0 A	CT-1	K, L	5 V.A	
	3.7KW x 4P	110%	1 SEC	1 SEC	7.3 A	8.2 A	CT-1	K, L	5 V.A	
2.8 TON	2.5KW x 8P	110%	1 SEC	1 SEC	7.3 A	8.2 A	CT-1	K, L	5 V.A	
	5.0KW x 4P	110%	1 SEC	1 SEC	9.6 A	11.2 A	CT-1	K, L	5 V.A	
	2.8KW x 8P	110%	1 SEC	1 SEC	7.3 A	8.2 A	CT-1	K, L	5 V.A	
3 TON	5.5KW x 4P	110%	1 SEC	1 SEC	9.6 A	11.2 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	10.5 A	12.0 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	12.9 A	14.2 A	CT-1	K, L	5 V.A	
5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	15.8 A	19.9 A	CT-1	K, L	5 V.A	
	4.2KW x 8P	110%	1 SEC	1 SEC	10.5 A	12.0 A	CT-1	K, L	5 V.A	
	5.5KW x 6P	110%	1 SEC	1 SEC	12.9 A	14.2 A	CT-1	K, L	5 V.A	
7.5 TON	8.5KW x 4P	110%	1 SEC	1 SEC	15.8 A	19.9 A	CT-1	K, L	5 V.A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

E.O.C.R 권고 SETTING치

극동하이스트(주)

* POWER SOURCE : AC 3Φ 220V 60Hz

HOIST	MOTOR 용량	MOTOR 정격 전류	DRIVE TYPE	E.O.C.R TYPE	권고 SETTING 치			REMARK
					DELAY TIME	OPERATION TIME	CURRENT	
0.5 TON	1.2KW x 8P	8.0 A	1 DRIVE	SS-30	3 SEC	1 SEC	8.0 A	
	1.5KW x 6P	7.6 A	1 DRIVE	SS-30	3 SEC	1 SEC	7.6 A	
	2.4KW x 4P	10.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.0 A	
1 TON	1.2KW x 8P	8.0 A	1 DRIVE	SS-30	3 SEC	1 SEC	8.0 A	
	1.5KW x 6P	7.6 A	1 DRIVE	SS-30	3 SEC	1 SEC	7.6 A	
	2.4KW x 4P	10.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.0 A	
2 TON	1.8KW x 8P	11.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	11.0 A	
	2.5KW x 6P	12.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	12.0 A	
	3.7KW x 4P	16.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.0 A	
2.8 TON	2.5KW x 8P	17.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	17.7 A	
	5.0KW x 4P	22.8 A	1 DRAVE	SS-30	3 SEC	1 SEC	22.8 A	
	2.8KW x 8P	17.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	17.7 A	
3 TON	5.5KW x 4P	22.8 A	1 DRAVE	SS-30	3 SEC	1 SEC	22.8 A	
	4.2KW x 8P	23.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	23.0 A	
	5.5KW x 6P	28.2 A	1 DRAVE	SS-30	3 SEC	1 SEC	28.2 A	
5 TON	8.5KW x 4P	34.4 A	1 DRAVE	SS-30	3 SEC	1 SEC	34.4 A	
	4.2KW x 8P	23.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	23.0 A	
	5.5KW x 6P	28.2 A	1 DRAVE	SS-30	3 SEC	1 SEC	28.2 A	
7.5 TON	8.5KW x 4P	34.4 A	1 DRAVE	SS-30	3 SEC	1 SEC	34.4 A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

E.O.C.R 권고 SETTING치

극동하이스트(주)

* POWER SOURCE : AC 3Φ 380V 60Hz

HOIST	MOTOR 용량	1 정격 전류	DRIVE TYPE	E.O.C.R TYPE	권고 SETTING 치			REMARK
					DELAY TIME	OPERATION TIME	CURRENT	
0.5 TON	1.2KW x 8P	4.6 A	1 DRIVE	SS-30	3 SEC	1 SEC	4.6 A	
	1.5KW x 6P	5.4 A	1 DRIVE	SS-30	3 SEC	1 SEC	5.4 A	
	2.4KW x 4P	5.6 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.6 A	
1 TON	1.2KW x 8P	4.6 A	1 DRIVE	SS-30	3 SEC	1 SEC	4.6 A	
	1.5KW x 6P	5.4 A	1 DRIVE	SS-30	3 SEC	1 SEC	5.4 A	
	2.4KW x 4P	5.6 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.6 A	
2 TON	1.8KW x 8P	6.4 A	1 DRAVE	SS-30	3 SEC	1 SEC	6.4 A	
	2.5KW x 6P	7.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.0 A	
	3.7KW x 4P	9.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	9.3 A	
2.8 TON	2.5KW x 8P	10.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.3 A	
	5.0KW x 4P	12.2 A	1 DRAVE	SS-30	3 SEC	1 SEC	12.2 A	
	2.8KW x 8P	10.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.3 A	
3 TON	5.5KW x 4P	12.2 A	1 DRAVE	SS-30	3 SEC	1 SEC	12.2 A	
	4.2KW x 8P	13.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	13.3 A	
	5.5KW x 6P	16.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.3 A	
5 TON	8.5KW x 4P	19.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	19.9 A	
	4.2KW x 8P	13.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	13.3 A	
	5.5KW x 6P	16.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.3 A	
7.5 TON	8.5KW x 4P	19.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	19.9 A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

E.O.C.R 권고 SETTING치

극동호이스트(주)

* POWER SOURCE : AC 3Φ 440V 60Hz

HOIST	MOTOR 용량	MOTOR 정격 전류	DRIVE TYPE	E.O.C.R TYPE	권고 SETTING 치			REMARK
					DELAY TIME	OPERATION TIME	CURRENT	
0.5 TON	1.2KW x 8P	4.0 A	1 DRIVE	SS-06	3 SEC	1 SEC	4.0 A	
	1.5KW x 6P	3.8 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.8 A	
	2.4KW x 4P	5.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.0 A	
1 TON	1.2KW x 8P	4.0 A	1 DRIVE	SS-06	3 SEC	1 SEC	4.0 A	
	1.5KW x 6P	3.8 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.8 A	
	2.4KW x 4P	5.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.0 A	
2 TON	1.8KW x 8P	5.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.5 A	
	2.5KW x 6P	5.8 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.8 A	
	3.7KW x 4P	8.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	8.0 A	
2.8 TON	2.5KW x 8P	8.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	8.9 A	
	5.0KW x 4P	10.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.5 A	
	2.8KW x 8P	8.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	8.9 A	
3 TON	5.5KW x 4P	10.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.5 A	
	4.2KW x 8P	11.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	11.5 A	
	5.5KW x 6P	14.1 A	1 DRAVE	SS-30	3 SEC	1 SEC	14.1 A	
5 TON	8.5KW x 4P	16.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.5 A	
	4.2KW x 8P	11.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	11.5 A	
	5.5KW x 6P	14.1 A	1 DRAVE	SS-30	3 SEC	1 SEC	14.1 A	
7.5 TON	8.5KW x 4P	16.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.5 A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

E.O.C.R 권고 SETTING치

극동호이스트(주)

* POWER SOURCE : AC 3Φ 460V 60Hz

HOIST	MOTOR 용량	MOTOR 정격 전류	DRIVE TYPE	E.O.C.R TYPE	권고 SETTING 치			REMARK
					DELAY TIME	OPERATION TIME	CURRENT	
0.5 TON	1.2KW x 8P	3.8 A	1 DRAVE	SS-06	3 SEC	1 SEC	3.8 A	
	1.5KW x 6P	3.6 A	1 DRAVE	SS-06	3 SEC	1 SEC	3.6 A	
	2.4KW x 4P	4.8 A	1 DRAVE	SS-06	3 SEC	1 SEC	4.8 A	
1 TON	1.8KW x 8P	5.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.3 A	
	2.5KW x 6P	5.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.8 A	
	3.7KW x 4P	7.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.7 A	
2 TON	1.8KW x 8P	5.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.3 A	
	2.5KW x 6P	5.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.8 A	
	3.7KW x 4P	7.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.7 A	
2.8 TON	2.5KW x 8P	7.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.7 A	
	5.0KW x 4P	10.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.0 A	
	2.8KW x 8P	7.7 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.7 A	
3 TON	5.5KW x 4P	10.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.0 A	
	4.2KW x 8P	11.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	11.0 A	
	5.5KW x 6P	13.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	13.5 A	
5 TON	8.5KW x 4P	16.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.5 A	
	4.2KW x 8P	11.0 A	1 DRAVE	SS-30	3 SEC	1 SEC	11.0 A	
	5.5KW x 6P	13.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	13.5 A	
7.5 TON	8.5KW x 4P	16.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	16.5 A	

NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

E.O.C.R 권고 SETTING치

극동호이스트(주)

* POWER SOURCE : AC 3Φ 480V 60Hz

HOIST	MOTOR 용량	MOTOR 정격 전류	DRIVE TYPE	E.O.C.R TYPE	권고 SETTING 치			REMARK
					DELAY TIME	OPERATION TIME	CURRENT	
0.5 TON	1.2KW x 8P	3.6 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.6 A	
	1.5KW x 6P	3.5 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.5 A	
	2.4KW x 4P	4.6 A	1 DRAVE	SS-06	3 SEC	1 SEC	4.6 A	
1 TON	1.2KW x 8P	3.6 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.6 A	
	1.5KW x 6P	3.5 A	1 DRIVE	SS-06	3 SEC	1 SEC	3.5 A	
	2.4KW x 4P	4.6 A	1 DRAVE	SS-06	3 SEC	1 SEC	4.6 A	
2 TON	1.8KW x 8P	5.1 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.1 A	
	2.5KW x 6P	5.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	5.3 A	
	3.7KW x 4P	7.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.3 A	
2.8 TON	2.5KW x 8P	7.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.3 A	
	5.0KW x 4P	9.6 A	1 DRAVE	SS-30	3 SEC	1 SEC	9.6 A	
	2.8KW x 8P	7.3 A	1 DRAVE	SS-30	3 SEC	1 SEC	7.3 A	
3 TON	5.5KW x 4P	9.6 A	1 DRAVE	SS-30	3 SEC	1 SEC	9.6 A	
	4.2KW x 8P	10.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.5 A	
	5.5KW x 6P	12.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	12.9 A	
5 TON	8.5KW x 4P	15.8 A	1 DRAVE	SS-30	3 SEC	1 SEC	15.8 A	
	4.2KW x 8P	10.5 A	1 DRAVE	SS-30	3 SEC	1 SEC	10.5 A	
	5.5KW x 6P	12.9 A	1 DRAVE	SS-30	3 SEC	1 SEC	12.9 A	
7.5 TON	8.5KW x 4P	15.8 A	1 DRAVE	SS-30	3 SEC	1 SEC	15.8 A	


NOTE

1. 상기 TABLE의 수치는 권고 SETTING 수치이며 MOTOR의 특성 및 현장 조건에 따라 변경 가능함.

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	3.7 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	16 A
12. LOCKED ROTOR CURRENT	93.3 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	80 %
15. POWER FACTOR AT 100% RATED LOAD	76 %
16. FULL LOAD TORQUE	48 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

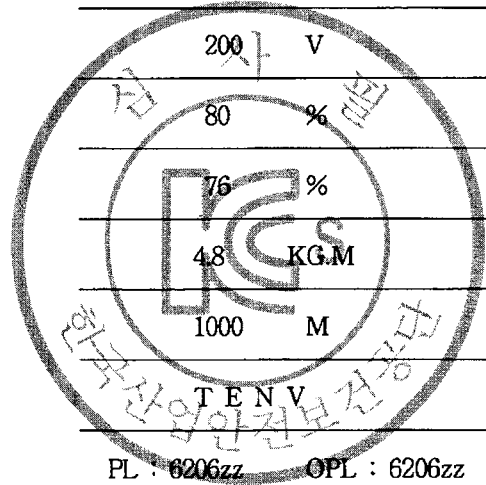


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA


1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	3.7 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	9.3 A
12. LOCKED ROTOR CURRENT	54 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	80 %
15. POWER FACTOR AT 100% RATED LOAD	76 %
16. FULL LOAD TORQUE	48 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

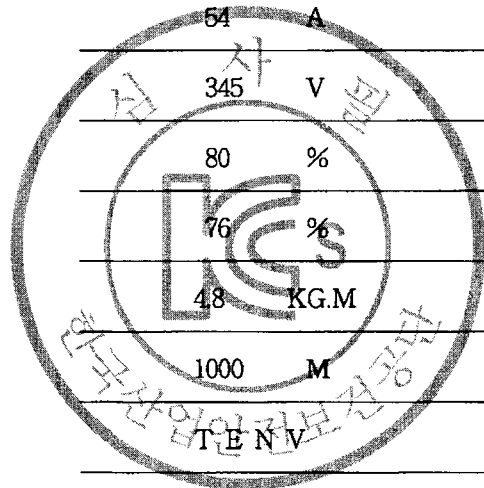

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	3.7 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	8.0 A
12. LOCKED ROTOR CURRENT	46.5 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	80 %
15. POWER FACTOR AT 100% RATED LOAD	76 %
16. FULL LOAD TORQUE	48 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

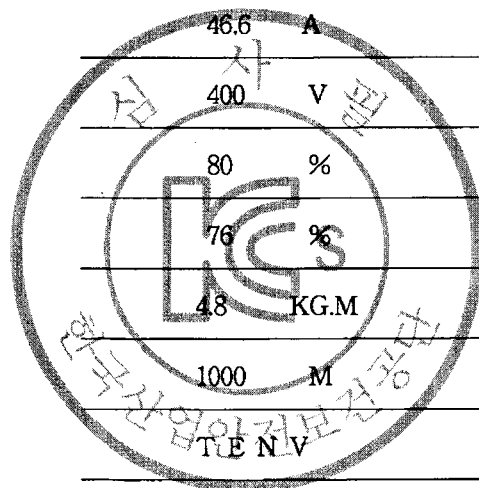


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA


1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	3.7 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	7.7 A
12. LOCKED ROTOR CURRENT	44.7 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	80 %
15. POWER FACTOR AT 100% RATED LOAD	76 %
16. FULL LOAD TORQUE	48 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

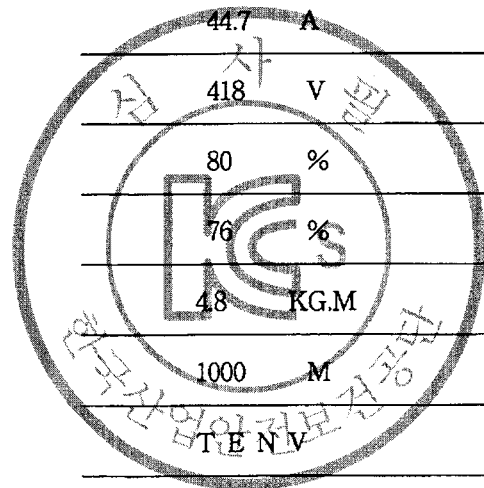

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA


1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	3.7 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	7.3 A
12. LOCKED ROTOR CURRENT	42.8 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	80 %
15. POWER FACTOR AT 100% RATED LOAD	76 %
16. FULL LOAD TORQUE	4.8 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

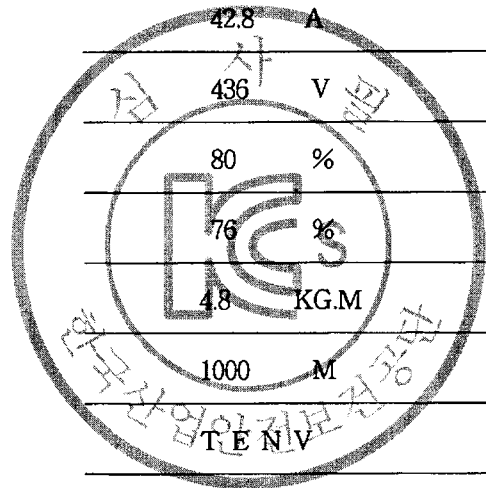

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA


1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	1.8 KW x 8 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	860 RPM
11. FULL LOAD CURRENT	11 A
12. LOCKED ROTOR CURRENT	55 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	71.5 %
15. POWER FACTOR AT 100% RATED LOAD	60 %
16. FULL LOAD TORQUE	6.93 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	H O R I Z O N T A L
21. MAXIMUM AMBIENT TEMPLERE	40 ℃
22. BEARING LUBRICATION	G R E A S E
23. STARTING METHOD	F U L L V O L T A G E

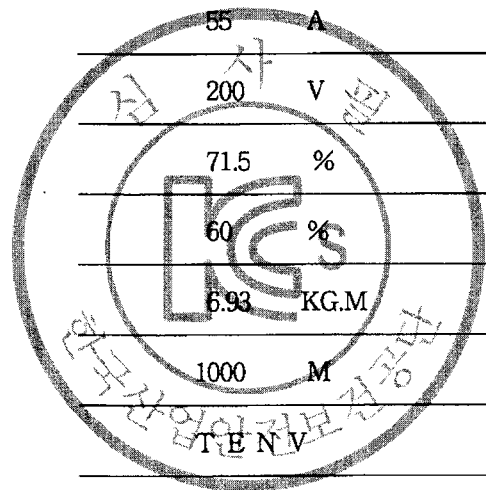

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	1.8 KW x 8 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	860 RPM
11. FULL LOAD CURRENT	6.4 A
12. LOCKED ROTOR CURRENT	31.9 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	71.5 %
15. POWER FACTOR AT 100% RATED LOAD	60 %
16. FULL LOAD TORQUE	6.93 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

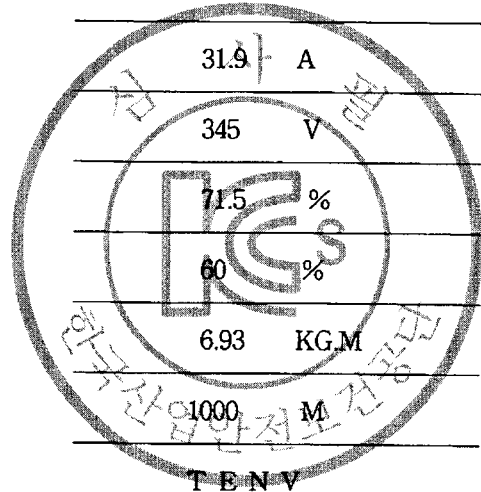


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	1.8 KW x 8 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	860 RPM
11. FULL LOAD CURRENT	5.5 A
12. LOCKED ROTOR CURRENT	27.5 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	71.5 %
15. POWER FACTOR AT 100% RATED LOAD	60 %
16. FULL LOAD TORQUE	6.93 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

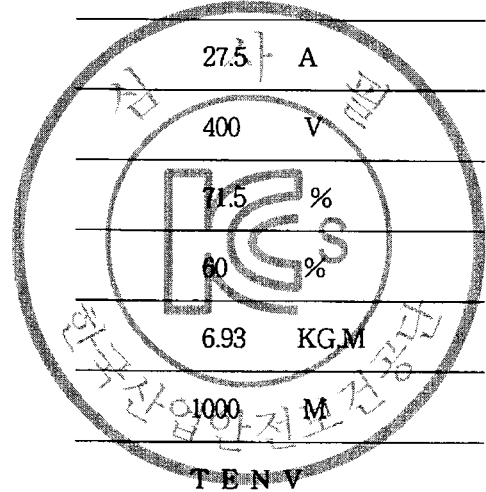


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	1.8 KW x 8 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	860 RPM
11. FULL LOAD CURRENT	5.3 A
12. LOCKED ROTOR CURRENT	26.4 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	71.5 %
15. POWER FACTOR AT 100% RATED LOAD	60 %
16. FULL LOAD TORQUE	6.93 KGM
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

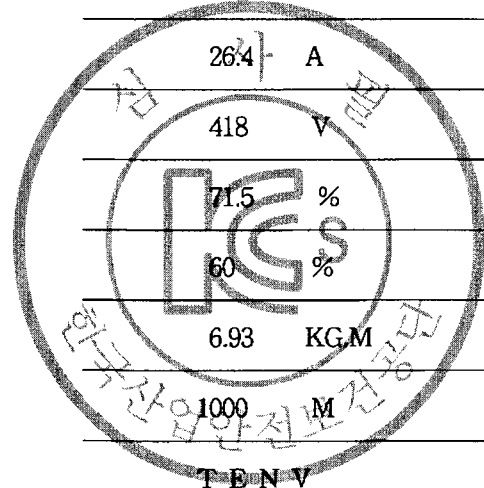


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	HOISTING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	112 M
4. RATED POWER	1.8 KW x 8 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	860 RPM
11. FULL LOAD CURRENT	5.1 A
12. LOCKED ROTOR CURRENT	25.3 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	71.5 %
15. POWER FACTOR AT 100% RATED LOAD	60 %
16. FULL LOAD TORQUE	6.93 KGM
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6206zz OPL : 6206zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

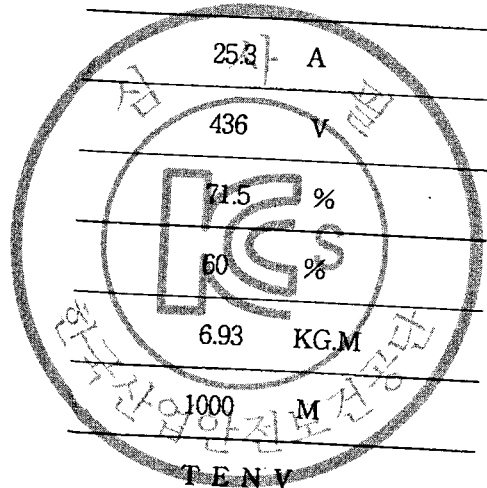


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.75 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	4.1 A
12. LOCKED ROTOR CURRENT	22.1 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	66 %
15. POWER FACTOR AT 100% RATED LOAD	73.5 %
16. FULL LOAD TORQUE	1.02 KGM
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

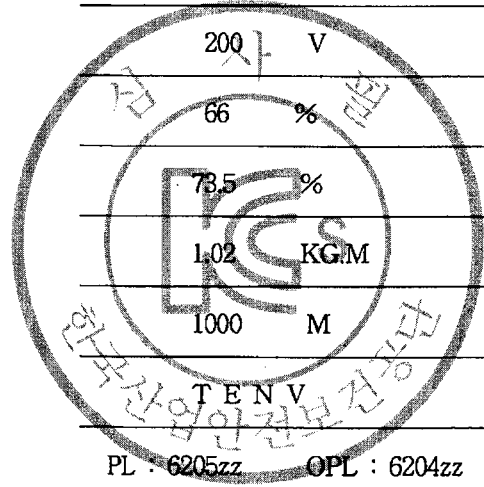


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1.SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.75 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	2.4 A
12. LOCKED ROTOR CURRENT	12.8 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	66 %
15. POWER FACTOR AT 100% RATED LOAD	73.5 %
16. FULL LOAD TORQUE	1.02 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

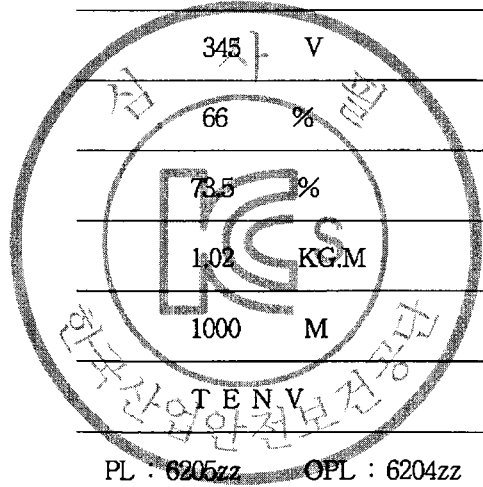


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.75 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	2.0 A
12. LOCKED ROTOR CURRENT	11.1 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	66 %
15. POWER FACTOR AT 100% RATED LOAD	73.5 %
16. FULL LOAD TORQUE	1.02 KGM
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

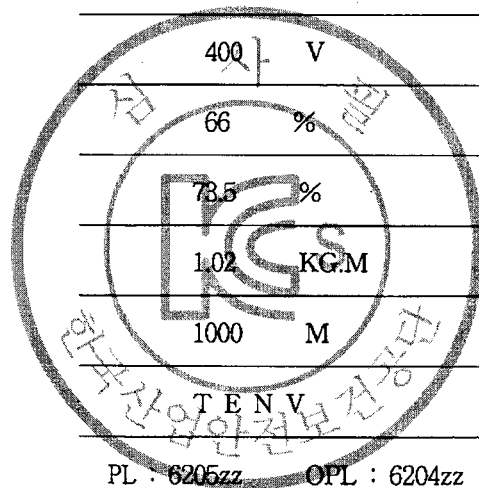


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.75 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 °C
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	2.0 A
12. LOCKED ROTOR CURRENT	10.6 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	66 %
15. POWER FACTOR AT 100% RATED LOAD	73.5 %
16. FULL LOAD TORQUE	1.02 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBRIENT TEMPURE	40 °C
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

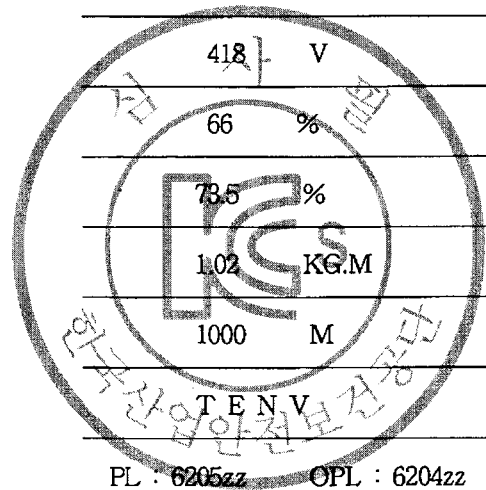


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.75 KW x 4 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1760 RPM
11. FULL LOAD CURRENT	1.9 A
12. LOCKED ROTOR CURRENT	10.2 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	66 %
15. POWER FACTOR AT 100% RATED LOAD	73.5 %
16. FULL LOAD TORQUE	1.02 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

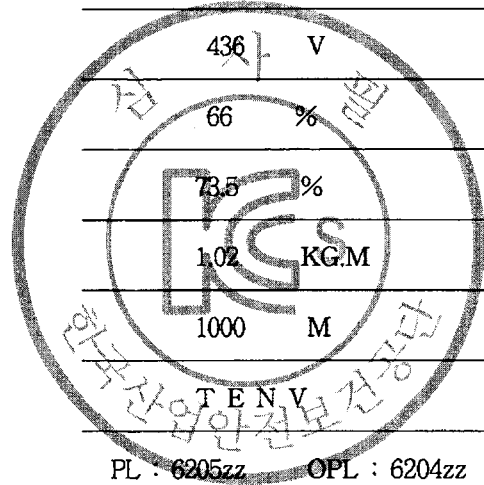


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA


1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.5 KW x 6 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1160 RPM
11. FULL LOAD CURRENT	3.4 A
12. LOCKED ROTOR CURRENT	16.4 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	64 %
15. POWER FACTOR AT 100% RATED LOAD	59.5 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TEN V
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

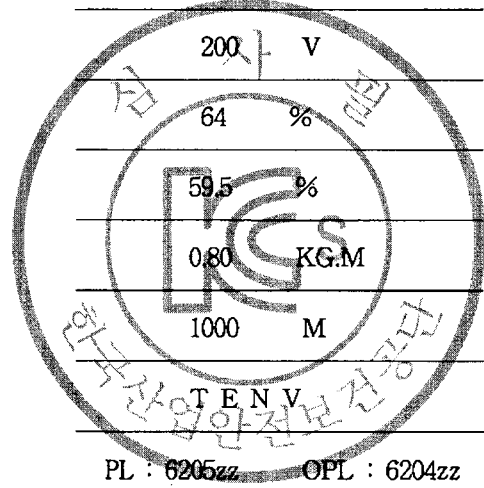

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.5 KW x 6 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1160 RPM
11. FULL LOAD CURRENT	2.0 A
12. LOCKED ROTOR CURRENT	9.5 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	64 %
15. POWER FACTOR AT 100% RATED LOAD	59.5 %
16. FULL LOAD TORQUE	0.80 KG·M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

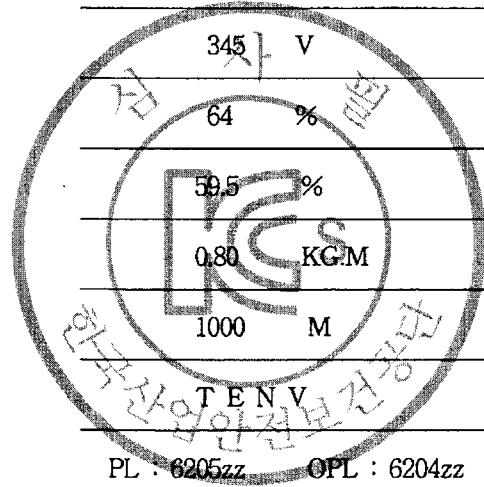


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.5 KW x 6 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1160 RPM
11. FULL LOAD CURRENT	1.7 A
12. LOCKED ROTOR CURRENT	8.2 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	64 %
15. POWER FACTOR AT 100% RATED LOAD	59.5 %
16. FULL LOAD TORQUE	0.80 KG·M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

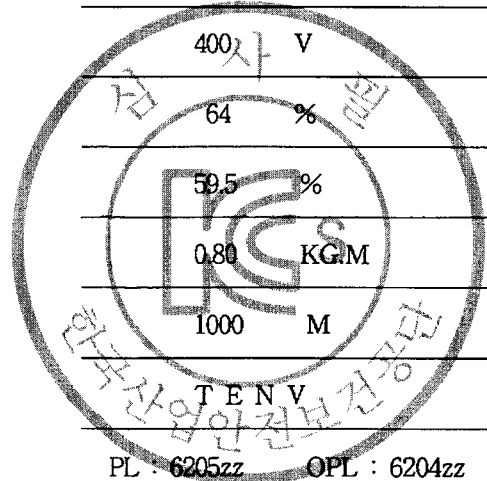


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.5 KW x 6 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1160 RPM
11. FULL LOAD CURRENT	1.7 A
12. LOCKED ROTOR CURRENT	7.9 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	64 %
15. POWER FACTOR AT 100% RATED LOAD	59.5 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

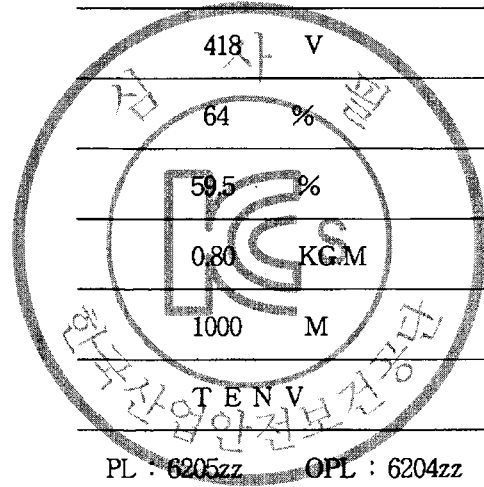


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 S
4. RATED POWER	0.5 KW x 6 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1160 RPM
11. FULL LOAD CURRENT	1.6 A
12. LOCKED ROTOR CURRENT	7.5 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	64 %
15. POWER FACTOR AT 100% RATED LOAD	59.5 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

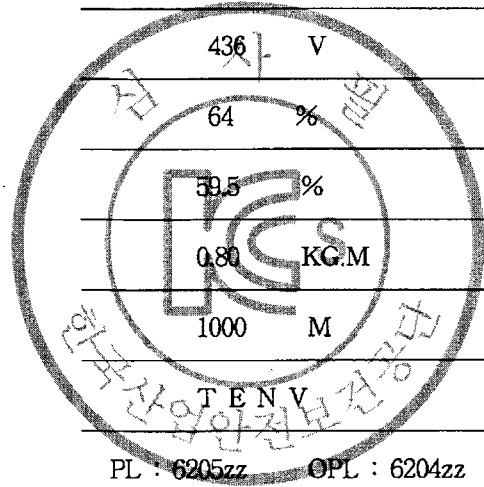


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 M
4. RATED POWER	0.8/0.4 KW x 4/8 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1750 / 850 RPM
11. FULL LOAD CURRENT	4.8/4.25 A
12. LOCKED ROTOR CURRENT	14.2/13.6 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	72.8/65.8 %
15. POWER FACTOR AT 100% RATED LOAD	82.3/75 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	H O R I Z O N T A L
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	G R E A S E
23. STARTING METHOD	F U L L V O L T A G E

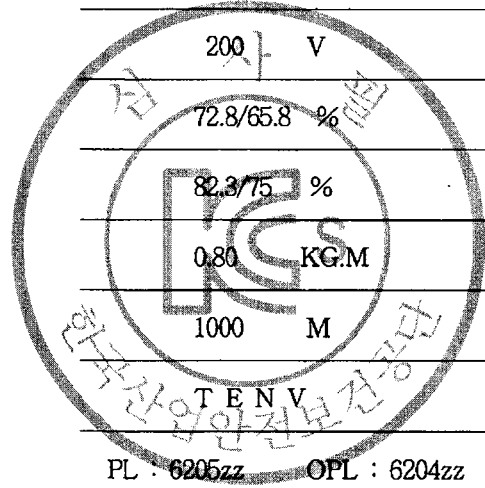


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 M
4. RATED POWER	0.8/0.4 KW x 4/8 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1750 / 850 RPM
11. FULL LOAD CURRENT	2.78/2.63 A
12. LOCKED ROTOR CURRENT	9.2/6.3 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	72.8/65.8 %
15. POWER FACTOR AT 100% RATED LOAD	82.3/75 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TEN V
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

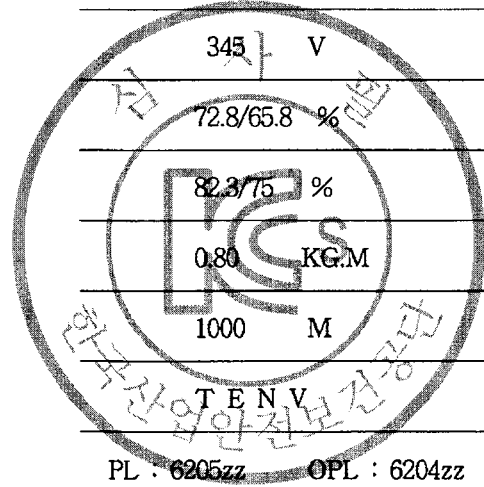


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 M
4. RATED POWER	0.8/0.4 KW x 4/8 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1750 / 850 RPM
11. FULL LOAD CURRENT	2.4/2.27 A
12. LOCKED ROTOR CURRENT	8.6/6.21 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	72.8/65.8 %
15. POWER FACTOR AT 100% RATED LOAD	82.3/75 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

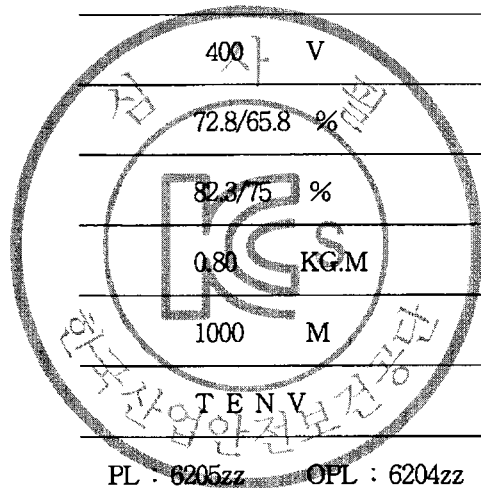


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 M
4. RATED POWER	0.8/0.4 KW x 4/8 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1750 / 850 RPM
11. FULL LOAD CURRENT	2.3/2.17 A
12. LOCKED ROTOR CURRENT	8.5/6.18 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	72.8/65.8 %
15. POWER FACTOR AT 100% RATED LOAD	82.3/75 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

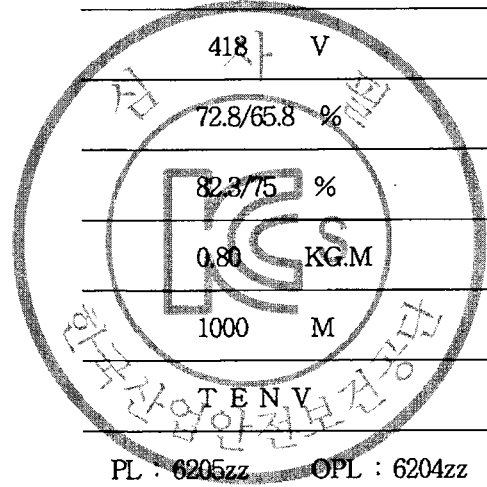


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 M
4. RATED POWER	0.8/0.4 KW x 4/8 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1750 / 850 RPM
11. FULL LOAD CURRENT	2.3/2.1 A
12. LOCKED ROTOR CURRENT	8.4/6.15 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	72.8/65.8 %
15. POWER FACTOR AT 100% RATED LOAD	82.3/75 %
16. FULL LOAD TORQUE	0.80 KG.M
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

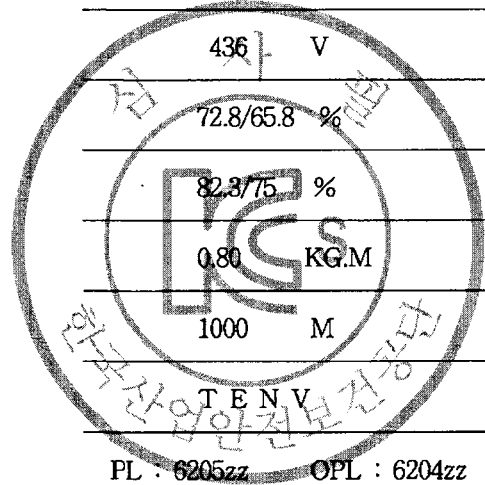


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 L
4. RATED POWER	0.5/025 KW x 6/12 P
5. RATED VOLTAGE AND FREQUENCY	220 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1050/460 RPM
11. FULL LOAD CURRENT	3.2/3.6 A
12. STARTING CURRENT AT RATED VOLTAGE	12.8/10.8 A
13. MINIMUM STARTING VOLTAGE	200 V
14. EFFICIENCY AT 100% RATED LOAD	57.5/35 %
15. POWER FACTOR AT 100% RATED LOAD	64.5/50 %
16. STARTING TORQUE	0.757/0.506 KGM
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	T E N V
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	H O R I Z O N T A L
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	G R E A S E
23. STARTING METHOD	F U L L V O L T A G E

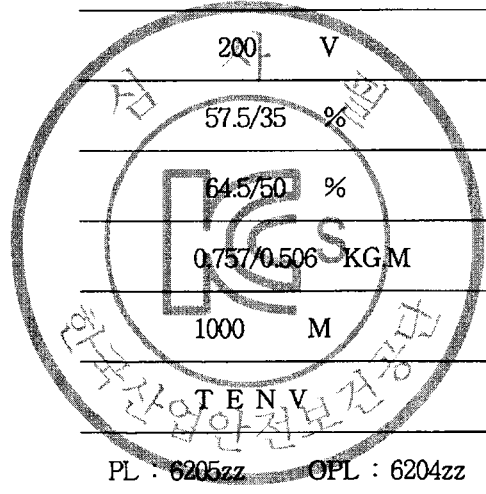


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 L
4. RATED POWER	0.5/025 KW x 6/12 P
5. RATED VOLTAGE AND FREQUENCY	380 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1050/460 RPM
11. FULL LOAD CURRENT	1.85/2.08 A
12. STARTING CURRENT AT RATED VOLTAGE	7.41/6.25 A
13. MINIMUM STARTING VOLTAGE	345 V
14. EFFICIENCY AT 100% RATED LOAD	57.5/35 %
15. POWER FACTOR AT 100% RATED LOAD	64.5/50 %
16. STARTING TORQUE	0.757/0.506 KGM
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

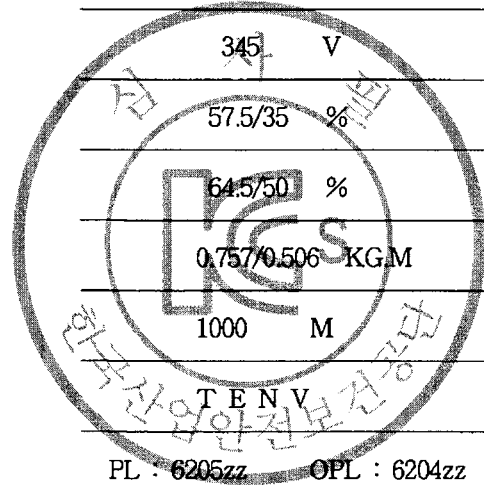


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 L
4. RATED POWER	0.5/0.25 KW x 6/12 P
5. RATED VOLTAGE AND FREQUENCY	440 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1050/460 RPM
11. FULL LOAD CURRENT	1.6/1.8 A
12. STARTING CURRENT AT RATED VOLTAGE	6.4/5.4 A
13. MINIMUM STARTING VOLTAGE	400 V
14. EFFICIENCY AT 100% RATED LOAD	57.5/35 %
15. POWER FACTOR AT 100% RATED LOAD	64.5/50 %
16. STARTING TORQUE	0.75/0.506 KG·M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

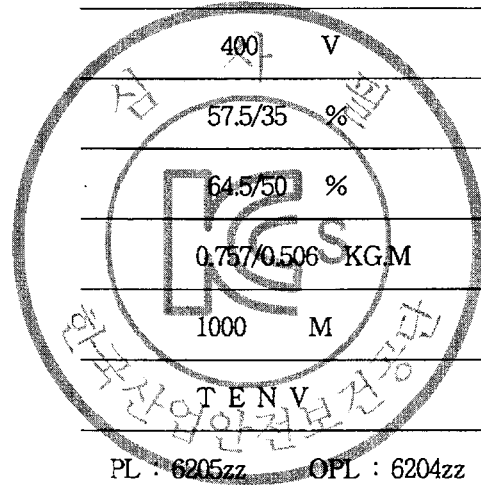


192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 L
4. RATED POWER	0.5/025 KW x 6/12 P
5. RATED VOLTAGE AND FREQUENCY	460 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATting	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1050/460 RPM
11. FULL LOAD CURRENT	1.5/1.72 A
12. STARTING CURRENT AT RATED VOLTAGE	6.2/5.3 A
13. MINIMUM STARTING VOLTAGE	418 V
14. EFFICIENCY AT 100% RATED LOAD	57.5/35 %
15. POWER FACTOR AT 100% RATED LOAD	64.5/50 %
16. STARTING TORQUE	0.757/0.506 KGM
17. SITE ALTTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

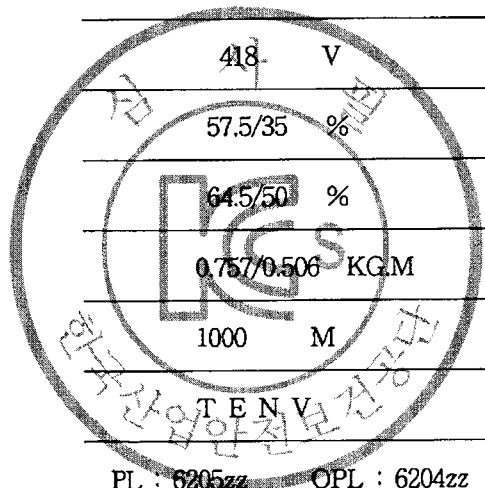


192.168.11.155 / 2011-07-12 14:37:27

192.168.11.155 / 2011-07-12 14:37:27

THREE PHASE INDUCTION MOTOR DATE SHEET

SCHEDULE OF TECHNICAL DATA

1. SERVICE	TRAVERSING
2. MANUFACTURE	극동호이스트 (주)
3. FRAME NUMBER	90 L
4. RATED POWER	0.5/025 KW x 6/12 P
5. RATED VOLTAGE AND FREQUENCY	480 V 60 Hz
6. MOTOR TYPE	SQUIRREL CAGE ROTOR TYPE
7. SERVICE FACTOR AND RATTING	1.0 , 30 MIN
8. LOCATION AND INSULATION CLASS	INDOOR, OUTDOOR, B CLASS
9. DESIGN TRMPERATURE RISE(BY RESISTANCE)	80 ℃
10. FULL LOAD SPEED	1050/460 RPM
11. FULL LOAD CURRENT	1.4/1.6 A
12. STARTING CURRENT AT RATED VOLTAGE	5.82/4.93 A
13. MINIMUM STARTING VOLTAGE	436 V
14. EFFICIENCY AT 100% RATED LOAD	57.5/35 %
15. POWER FACTOR AT 100% RATED LOAD	64.5/50 %
16. STARTING TORQUE	0.757/0.506 KG/M
17. SITE ALTITUDE(UNDER)	1000 M
18. ENCLOSURE & COOLING METHOD	TENV
19. TYPE OF BEARING	PL : 6205zz OPL : 6204zz
20. MOUNTING	HORIZONTAL
21. MAXIMUM AMBIENT TEMPURE	40 ℃
22. BEARING LUBRICATION	GREASE
23. STARTING METHOD	FULL VOLTAGE

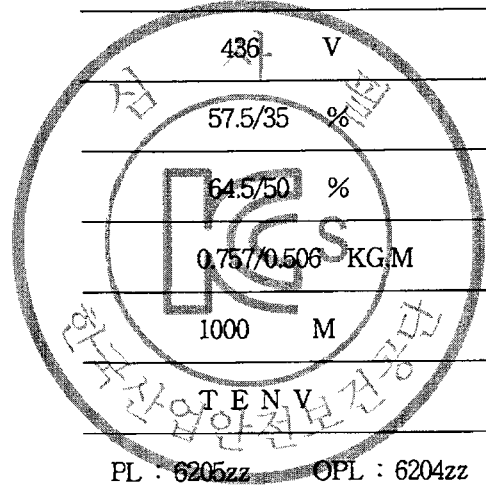

192.168.11.155 / 2011-07-12 14:37:27



Manho Rope & Wire Ltd.

Registered by

Manufacture
1880-11, SONGJUNG-DONG, GANGBEOK-KU,
BUSAN, KOREA
TEL : 82-51-631-5811-6
FAX : 82-51-631-5817

AMERICAN BUREAU OF SHIPPING
LLOYD'S REGISTER OF SHIPPING
GERMANischer Lloyd
DET ROYSE VERITAS
DINA REGISTER ITALIANO NAVALE
JAPANESE TRADE SHIP

Sheet No. 2011B-315-01

Date MAY 31, 2011

MILL TEST CERTIFICATE

Customer : NIKESYS
Supplier : NIKESYS MANHO ROPE & WIRE LTD.
L/C No. :
Commodity : GALVANIZED STEEL WIRE ROPE
Construction : 6X19 W Grade : 180 N5/mm
Specification : KS K5514 Lubrication : DRY
Order Quantity : 2,000.00 m Keel No. :
Gross Weight : Net Weight : 488.00 kgs

TEST RESULT

Rope Dia : 8.00 (Actual) 8.050 mm Performing :
Kind of Lay : R.H.R.L Length of Lay : 30.00 mm
Actual Breaking strength of Wire Rope : 3,900.00 Kgs
Nominal Dia. of Wire : 6.35 mm
Tensile Strength of Wires Min : 184 Max : 189 Kgf/mm²
Number of Turns of Wires Min : 30 Max : 30
Weight of Zinc Coating : 54.300 g / m²

CHEMICAL ANALYSIS OF WIRE ROD

Heat No.	C	Si	Mn	P	S
SA18527	0.0282	0.195	0.758	0.0128	0.0071

MANHO




MHS-B102-31

Manho Rope & Wire Ltd.

Quality Control Dept

(203X280)

192.168.11.155 / 2011-07-12 14:37:27



한국산업안전보건공단

192.168.11.155 / 2011-07-12 14:37:27